



An SVI Brand Product Line

(800) 321-8173

**ENVIRONMENTALLY FRIENDLY
AND SAFE TO OPERATE!**

Operates off of Compressed Air and
Non-Vegetable Based Fluid
Just Like That Used by the US Coast Guard

FSDT-28


Since 1928.

Now, it's your turn to own a Globe.

Simple!

It goes up.
It goes down.
When you want.
Every time.

12,000 Capacity

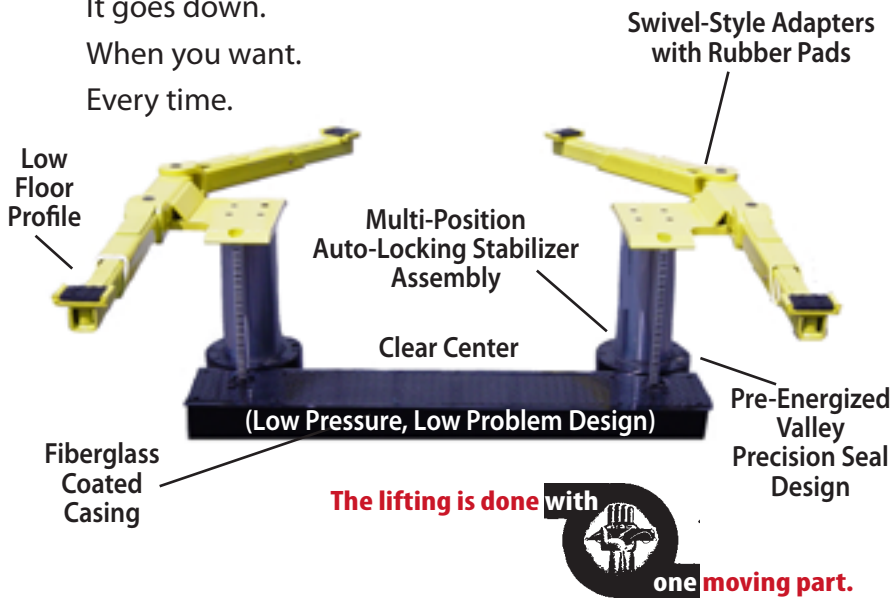

- Handles Most Domestic and Imported Models
- 360° Swivel Adapters
- Low Profile - 4-3/4" Road Clearance
- Ideal in Virtually Any Shop
- Great for Front End and Suspension Work

Specifications:

- Capacity:** 12,000 lbs. @ 150PSI (3,000 lbs. per Adapter)
- Operation:** "BS" = Full-Hydraulic
- Rise:** 72" Floor to Top of the Adapter Pad without Extension
- Plunger Centers:** 57-1/2"
- Displacement:** 36 gallons
- Initial Fill:** 65 gallons
- Cylinders:** 8-1/2" Diameter
- Superstructure:** Solid Steel Bolster-Style and Low Profile Swing Arms
- Adapters:** 360° Nesting Style, Swivel Adjustable on Sliding Sleeves
- Low Oil Control and Auto Lock Leg:** Supplied in Accordance with ANSI B153.1 Specifications

Two-Post,
Frame Contact
Passenger Car Lift

Model FSDT-28BS-N
Model FSDT-28BS-W
(All Full-Hydraulic)

Applications:

- Car Dealerships
- Hummer H1s & H2s
- Tire Dealerships
- Muffler Shops
- Brake Shops
- Tune Up Centers
- Service Stations
- Body Shops
- Fleet Service
- Quick Lubes
- Scrap Yards
- Anywhere Auto

These models are exempt from Federal EPA regulation.

In-ground lifts are making a major resurgence due to their solid design and proven service life. Nothing outperforms or costs less to operate than an in-ground lift.

Get in, get one!



STANDARD FEATURES

Nesting Style Frame Kontakt Adapters



Standard 360° swivel adapters mean Globe lifts provide ultimate versatility in reaching proper pickup points on the vehicles you are lifting. Replaceable rubber arm pads are steel reinforced and help prevent damage to undercoating.

Positive Stabilization


Mechanical heavy-duty racks and pinions equalize plunger movement.

Automatic Locking

A spring-loaded latch automatically engages into notches on the backside of the rack bar as the lift is raised. To lower, release lock and upon full descent, the locks automatically reset and remain ready for the next job.

“BBLM” Technology

Brute Strong
Built Simple
Low Problem
Made-To Last



Since 1928

Room to Work

Globe “28” Models give you the flexibility and all the room you need for under-the-car repair or service.

In your business, accessibility means faster repairs, more cars in and out everyday.

Get Globe working for you!

OPTIONAL FEATURES

Height Extensions

Nesting-style height extensions slip easily onto the Frame Kontakt 360° swivel adapter and into the swing arm nesting socket so reaching the proper pickup points is a breeze.

SUGGESTED WRITTEN SPECIFICATIONS

FUNCTION: To raise domestic and imported vehicles by their frames or bodies permitting maximum undercarriage service accessibility with wheels in relaxed position. Uses twin cylinders with 68” stroke and 12,000 lb. capacity at 150 psi shop air pressure.

POWER CYLINDER: To use minimum 8-1/2” plunger diameter cylinder of full-hydraulic

design featuring wiper seal, pre-energized packing seal, removable bearings and plungers. Rack and pinion equalizer system will keep movement even and an automatic lock latch is provided for each cylinder.

SUPERSTRUCTURE: The lift provides four (4) telescopic swing arms on low profile superstructure and an adapter pad height

of 4-3/4” above the floor. The adapter assembly is multi-position and has a rated capacity of 3,000 lbs.

CONTROLS: An A.S.M.E. fluid storage tank with one (1) 1/2” air control (locking), an air valve muffler and one (1) 1-1/4” oil control valve are included.

GLOBE VERSATILITY

This twin-post lift with its clear center and adjustable sleeve and adapters provides mechanics more accessibility to the vehicle, allowing faster inspection, repair and lubrication. Plus, the unobstructed floor area allows easy positioning of portable tool carts, work benches and transmission dollies.



For proper operation and to qualify for warranty service, all equipment must be installed according to detailed installation instructions, which accompany each unit.



An SVI Brand Product Line

Dimensional Data

FSDT Model	-28BS-W	-28BS-N
Rise without Extensions	72-1/4"	72-1/4"
Overall Width	102"	86"
Drive thru Clearance	88"	72"
Reach Long Arm Min.	30"	23"
Reach Long Arm Max.	46"	35"
Reach Short Arm Min.	30"	23"
Reach Short Arm Max.	46"	35"
Reach Overall Arm Min.	77"	70"
Reach Overall Arm Max.	110"	92"
Adapter Height Min.	4-3/4"	4-3/4"
w/2-1/2" Extension	7-1/4"	7-1/4"
w/3-1/2" Extension	8-1/4"	8-1/4"
Capacity Overall	12,000 lbs.	12,000 lbs.
Capacity per Arm	3,000 lbs.	3,000 lbs.
Plunger Diameter	8-1/2"	8-1/2"
Plunger Centers	57-1/2"	57-1/2"
Power Source	150 psi air	150 psi air
Ideal Bay Size	12' x 26'	11' x 24'



On Solid Ground

For more information about this lift and other quality Globe lifts, call us at (800) 321-8173.

(800) 321-8173

155 Harvestore Drive • DeKalb, IL
www.sviinternational.com