


Globe
Heavy Duty

“WS” Series
Lifting Systems

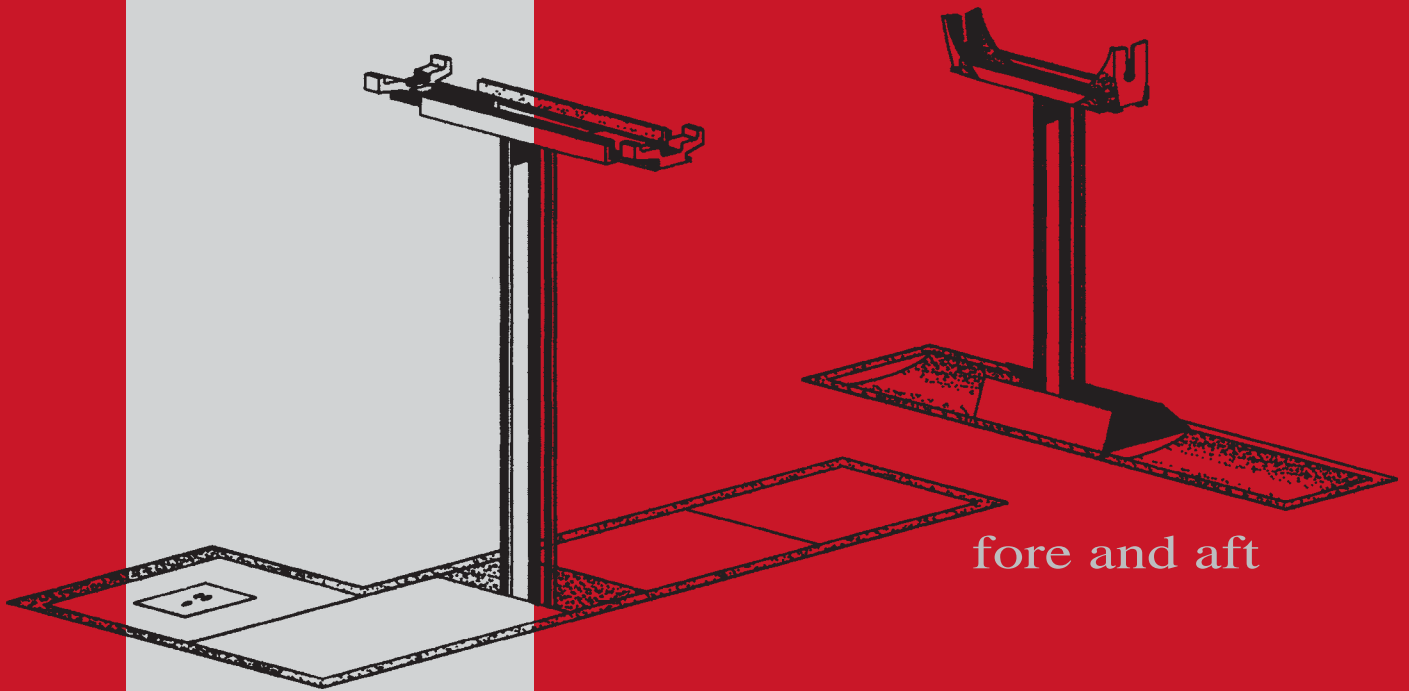

GLOBE
Since 1928

fore and aft heavy duty lifts

“WS” Series Contents

Globe Model Number	Pages
2P-102	5 and 6
2P-103	7 and 8
2P-202	9 and 10
2P-203	11 and 12
2P-107	13 and 14
2P-108	15 and 16
2P-105	17 and 18
2P-105-M	19 and 20
2P-105-IB	21 and 22
2P-106	23 and 24
2P-106-M	25 and 26
2P-106-IB	27 and 28
3P-106-DR	29 and 30
3P-106-DR-IB	31 and 32
4P-106	33 and 34
4P-106-IB	35 and 36
2P-1012	37 and 38
2P-1012-IB	39 and 40
2P-1012-DDWS	41 and 42
2P-1012-DOR	43 and 44
2PF-1212-IB	45 and 46

Standard parts and labor warranty. See Globe's comprehensive guide to warranties for full details.



Call for custom configurations and specialty applications.

Replacement front kits and rear sections are available to fit most makes and models of heavy duty lifts already existing in the field.












It's your turn to own a Globe, specify one today.

Since 1928

“WS” Series Lifting Systems

Proven Lifting Solutions

Proven Lifting Technology

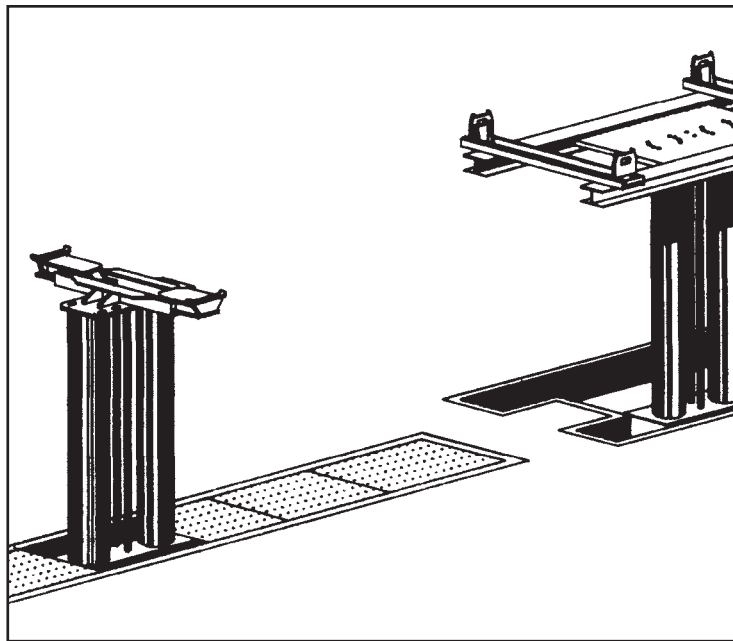

**Providing
Capacity
Ranges
from
11,000 lbs.
and
up!**

No lift is more reliable or economical to operate than a “WS” Series in-ground lift. Proven for years, in fact, many “WS” style lifts installed well over 50 years ago are still in service, operating as reliably as the day they were installed. Why? Because, “WS” Series lifts have few moving parts and the design is simple and above all sound.

Safety is key. “WS” Series low pressure high volume hydraulic lifting systems from Globe Lift provide the safety you require.

Besides, in-ground low pressure lifts are not illegal, banned or even regulated. The EPA has permanently exempted them from regulation. For a copy of the federal mandate you may contact us or refer to www.fedregs.gov/tanks. Also, if petro based hydraulic oil is a concern there are many high quality alternatives and we don't mean vegetable based products. Before you consider an alternative to a “WS” Series Lift, know the facts.

For the real deal in solutions lifting solutions, nothing beats a “WS” Series lift in function, aesthetics and longevity. For lifts that last well over 50 years, it's Globe!

GLOBE
 ADJUSTABLE
 TWO-POST
**HEAVY DUTY
 BUS and TRUCK
 HOIST**
 COMPLETE UNDERSIDE ACCESSIBILITY
 WIDEST WHEELBASE ACCOMMODATION RANGE

**MODELS
 MP-210
 MP-710**

© 1947 STAMINGTON WAYNE CORPORATION

REPRINTED FROM
 FLEET OWNER - MAY 1949 ISSUE

RALEIGH TRACTOR & EQUIP. CO.

[INTERNATIONAL HARVESTER DEALER]

USES GLOBE TRUCK HOISTS

**ENGINEERED
 GLOBE
 INSTALLATION**

What a difference it makes when you can service your trucks like this! In and out of the shop twice as fast . . . better servicing all round . . . when you lift them UP on a Globe Hoist, for complete accessibility.

This Globe-Engineered installation for the International Harvester dealer at Raleigh, N. C. employs two Globe type SER-212 Universal 2-Post Truck Hoists. It was planned by Globe's specialized engineering service in cooperation with Raleigh Tractor & Equipment Co. to exactly meet their needs for every type of inspection, maintenance, and overhaul service. Result: maximum efficiency in service.

Write for complete information on Globe's Engineering Consultation Service . . . and for illustrated specifications on Globe Bus & Truck Hoists. Address: GLOBE HOIST COMPANY, Bus & Truck Division, 1000 E. Mermaid Lane, Philadelphia 18, Penna.

GLOBE BUS & TRUCK HOISTS
 FOR ALL WEIGHTS AND WHEEL BASES
 GLOBE HOIST CO. • Des Moines, Iowa • Philadelphia, Pa.

Large photo here shows installation of two Globe type SER-212 2-Post Truck Hoists, offering ready accessibility to all underside parts.

Versatility of the SER-212 Hoist is shown in the two small photos above. Top picture illustrates a short wheel-base vehicle on the Hoist. Bottom photo shows a long wheel-base vehicle on same Hoist.


GLOBE HOIST COMPANY

EAST MERMAID LANE
 PHILADELPHIA 18, PENNA., U.S.A.

Cable Address GLOBEHOIST
 Plants at Des Moines, Iowa and Philadelphia, Penna.

2P-102

- **Lifting capacity: 11,000 lbs., 5,500 front & 5,500 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Air/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 7-1/2" front & rear**
- **Displacement: 28 gallons**
- **Raised vehicle contact height above floor: 69" front & 73-5/8" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

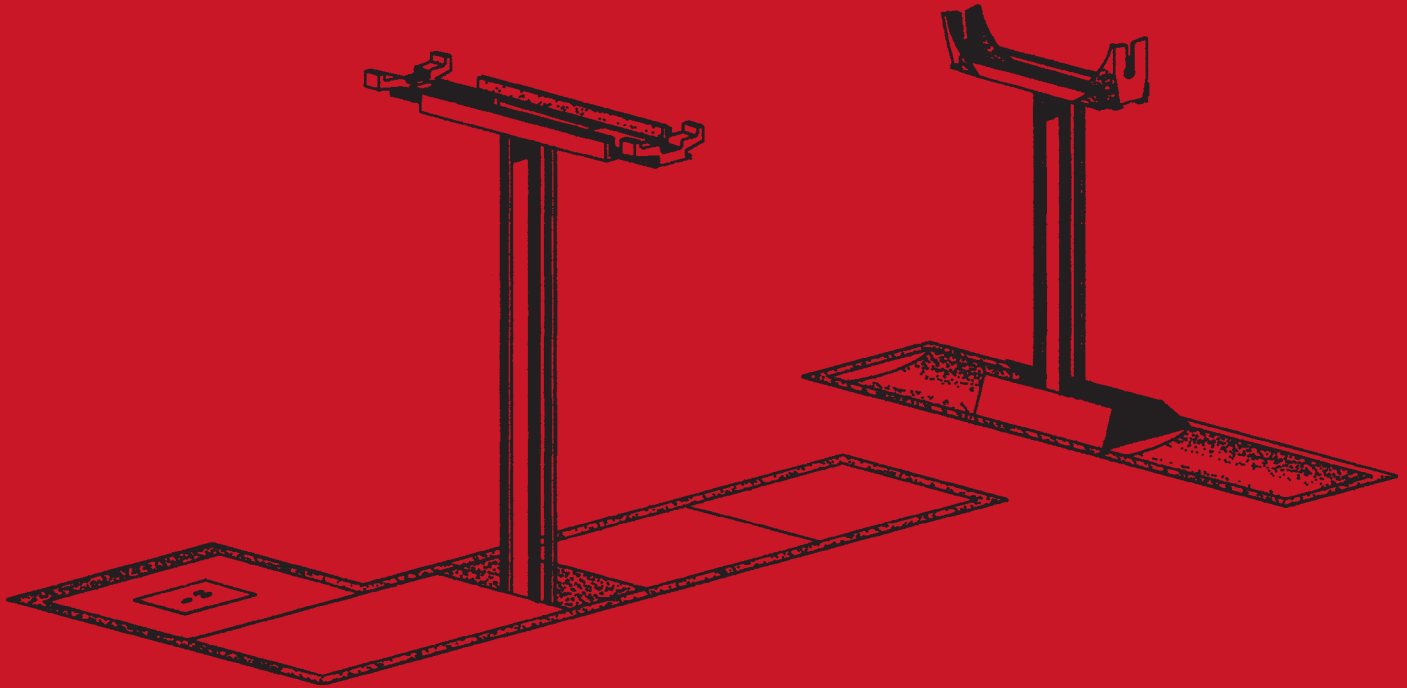

Passenger car
Light truck

Globe “WS” Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-102 Standard Equipment:

8 foot front frame (non-recessed), manual waist height release automatic lift locks, leverage bar front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, standard bottom pipe tank with low oil lock and non-fiberglass components. Standard front adapters adjust from 34” to 50-3/4” in width and standard rear adapters are adjustable from 20” to 30-1/2”.

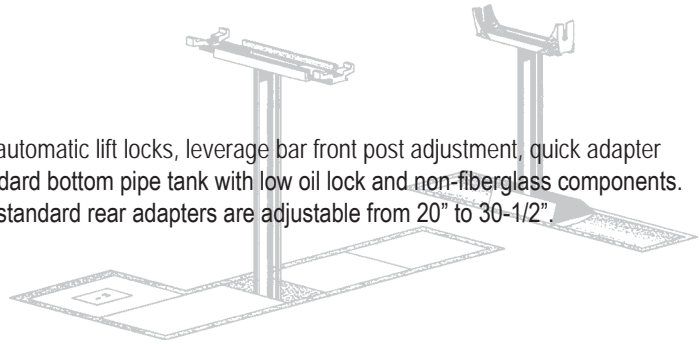

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9670-009-L	9' Front Frame	SV-9670-013-L	13' Front Frame
SV-9670-010-L	10' Front Frame	SV-9670-014-L	14' Front Frame
SV-9670-011-L	11' Front Frame	SV-9670-015-L	15' Front Frame
SV-9670-012-L	12' Front Frame	SV-9670-016-L	16' Front Frame

Additional front frame length including a control box extension and manual ratchet drive.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-85-009H-L	9' Frame, Control Ext. & Ratchet	SV-85-013H-L	13' Frame, Control Ext. & Ratchet
SV-85-010H-L	10' Frame, Control Ext. & Ratchet	SV-85-014H-L	14' Frame, Control Ext. & Ratchet
SV-85-011H-L	11' Frame, Control Ext. & Ratchet	SV-85-015H-L	15' Frame, Control Ext. & Ratchet
SV-85-012H-L	12' Frame, Control Ext. & Ratchet	SV-85-016H-L	16' Frame, Control Ext. & Ratchet

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-52-L

Power Spot Upgrade:

Not available on this model.

Tank Upgrade:

Your choice of three upgrades. Add fiberglass coating or go to a top pipe style tank. Fiberglass coating protects your component from corrosion. Top pipe style tanks give installers easy access to fittings and helps periodic inspection.

Globe Upgrade Number	Description
SV-9801-1-L	Add Fiberglass Coating to the Standard Tank
SV-9801-2-L	Change the Standard Tank to a Top Pipe Tank
SV-9801-3-L	Add Fiberglass Coating and Change the Standard Tank to a Top Pipe Tank

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9670-05FG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9670FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly




Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115
phone: 815-748-0200 • 800-321-8173
fax: 815-748-0210 • 800-899-1784

2P-103*

- **Lifting capacity: 16,000 lbs., 8,000 front & 8,000 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Electric/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 7-1/2" front & rear**
- **Displacement: 28 gallons**
- **Raised vehicle contact height above floor: 69" front & 73-5/8" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

** Requires a power unit*

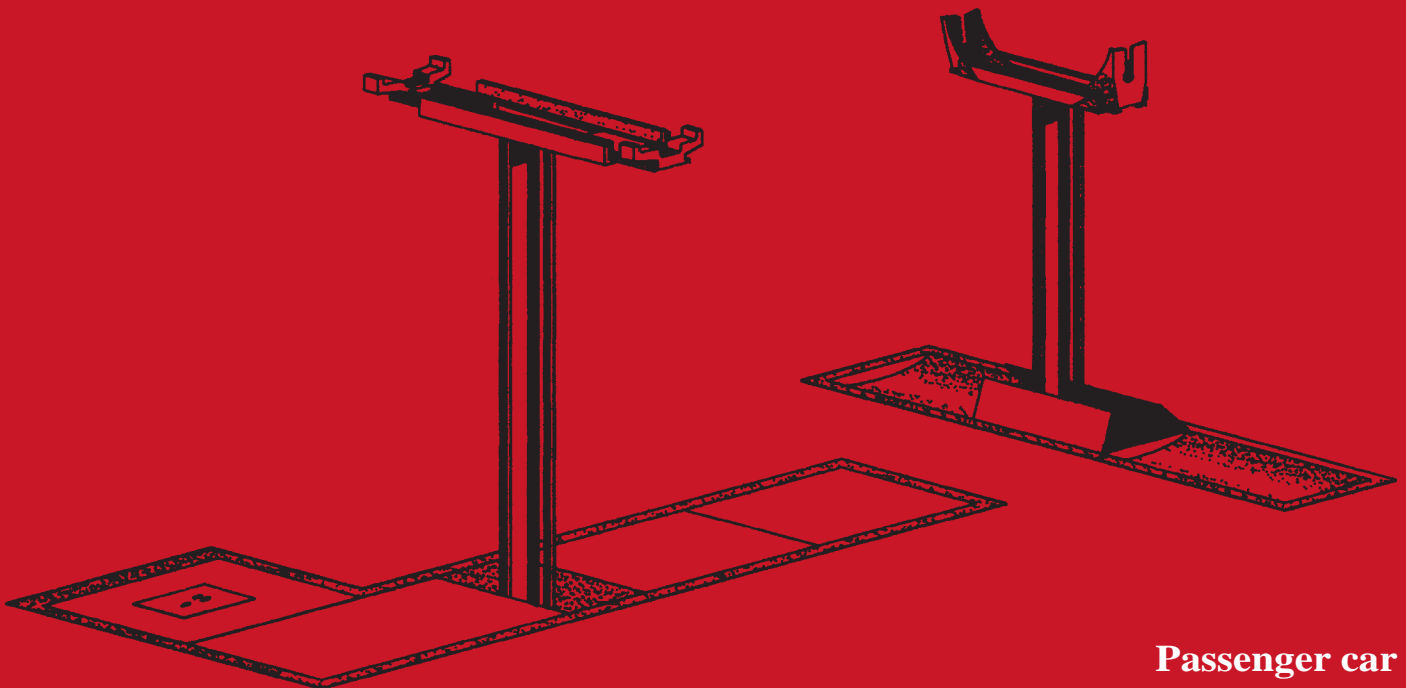

**Passenger car
Light truck**

Globe “WS” Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-103 Standard Equipment:

8 foot front frame (non-recessed), manual waist height release automatic lift locks, leverage bar front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 34” to 50-3/4” in width and standard rear adapters are adjustable from 20” to 30-1/2”.

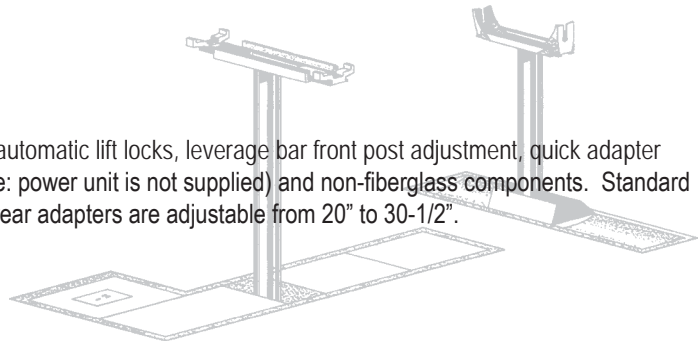

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9670-009-L	9' Front Frame	SV-9670-013-L	13' Front Frame
SV-9670-010-L	10' Front Frame	SV-9670-014-L	14' Front Frame
SV-9670-011-L	11' Front Frame	SV-9670-015-L	15' Front Frame
SV-9670-012-L	12' Front Frame	SV-9670-016-L	16' Front Frame

Additional front frame Length including a control box extension and manual ratchet drive.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-85-009E-L	9' Frame, Control Ext. & Ratchet	SV-85-013E-L	13' Frame, Control Ext. & Ratchet
SV-85-010E-L	10' Frame, Control Ext. & Ratchet	SV-85-014E-L	14' Frame, Control Ext. & Ratchet
SV-85-011E-L	11' Frame, Control Ext. & Ratchet	SV-85-015E-L	15' Frame, Control Ext. & Ratchet
SV-85-012E-L	12' Frame, Control Ext. & Ratchet	SV-85-016E-L	16' Frame, Control Ext. & Ratchet

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-52-L

Power Spot Upgrade:

Not available on this model.

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9670-05FG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9670FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground


An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

2P-202

- Lifting capacity: 11,000 lbs., 5,500 front & 5,500 rear
- Single moveable front and single stationary rear
- Axle engaging front & wheel or axle engaging rear
- Adjustable front cylinder for various wheelbase lengths
- Air/hydraulic oil or biodegradable fluid operated
- Post diameters: 7-1/2" front & rear
- Displacement: 28 gallons
- Raised vehicle contact height above floor: 69" front & 73-5/8" rear based on standard adapters
- Multiple lip seal seal design for increased performance

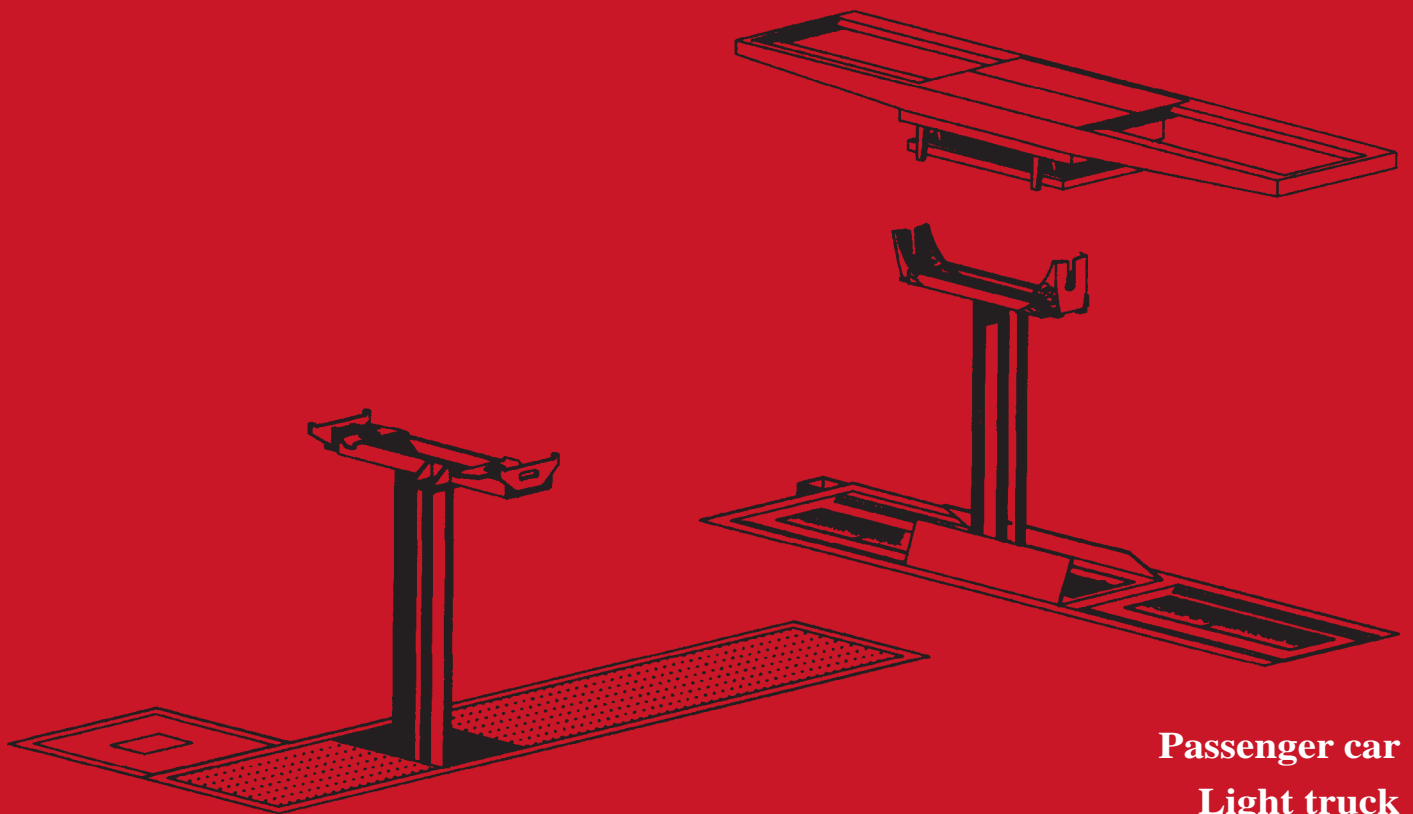

Globe "WS" Series Lifting Systems


**fastest, most reliable and
economical method for lifting**

for standards & options see back

GLOBE

Proven Lifting Technology

“WS” Series Information

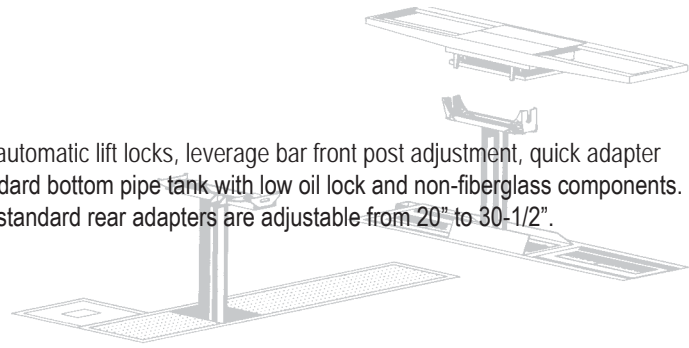

2P-202 Standard Equipment:

8 foot front frame (non-recessed), manual waist height release automatic lift locks, leverage bar front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, standard bottom pipe tank with low oil lock and non-fiberglass components. Standard front adapters adjust from 34" to 50-3/4" in width and standard rear adapters are adjustable from 20" to 30-1/2".

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9670-009-L	9' Front Frame	SV-9670-013-L	13' Front Frame
SV-9670-010-L	10' Front Frame	SV-9670-014-L	14' Front Frame
SV-9670-011-L	11' Front Frame	SV-9670-015-L	15' Front Frame
SV-9670-012-L	12' Front Frame	SV-9670-016-L	16' Front Frame

Additional front frame length including a control box extension and manual ratchet drive.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-85-009H-L	9' Frame, Control Ext. & Ratchet	SV-85-013H-L	13' Frame, Control Ext. & Ratchet
SV-85-010H-L	10' Frame, Control Ext. & Ratchet	SV-85-014H-L	14' Frame, Control Ext. & Ratchet
SV-85-011H-L	11' Frame, Control Ext. & Ratchet	SV-85-015H-L	15' Frame, Control Ext. & Ratchet
SV-85-012H-L	12' Frame, Control Ext. & Ratchet	SV-85-015H-L	16' Frame, Control Ext. & Ratchet

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-52-L

Power Spot Upgrade:

Not available on this model.

Tank Upgrade:

Your choice of three upgrades. Add fiberglass coating or go to a top pipe style tank. Fiberglass coating protects your component from corrosion. Top pipe style tanks give installers easy access to fittings and helps periodic inspection.

Globe Upgrade Number	Description
SV-9801-1-L	Add Fiberglass Coating to the Standard Tank
SV-9801-2-L	Change the Standard Tank to a Top Pipe Tank
SV-9801-3-L	Add Fiberglass Coating and Change the Standard Tank to a Top Pipe Tank

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9670-05FG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9670FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115


phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

2P-203*

- Lifting capacity: 16,000 lbs., 8,000 front & 8,000 rear
- Single moveable front and single stationary rear
- Axle engaging front & wheel or axle engaging rear
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: 7-1/2" front & rear
- Displacement: 28 gallons
- Raised vehicle contact height above floor: 69" front & 73-5/8" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit,
sold separately

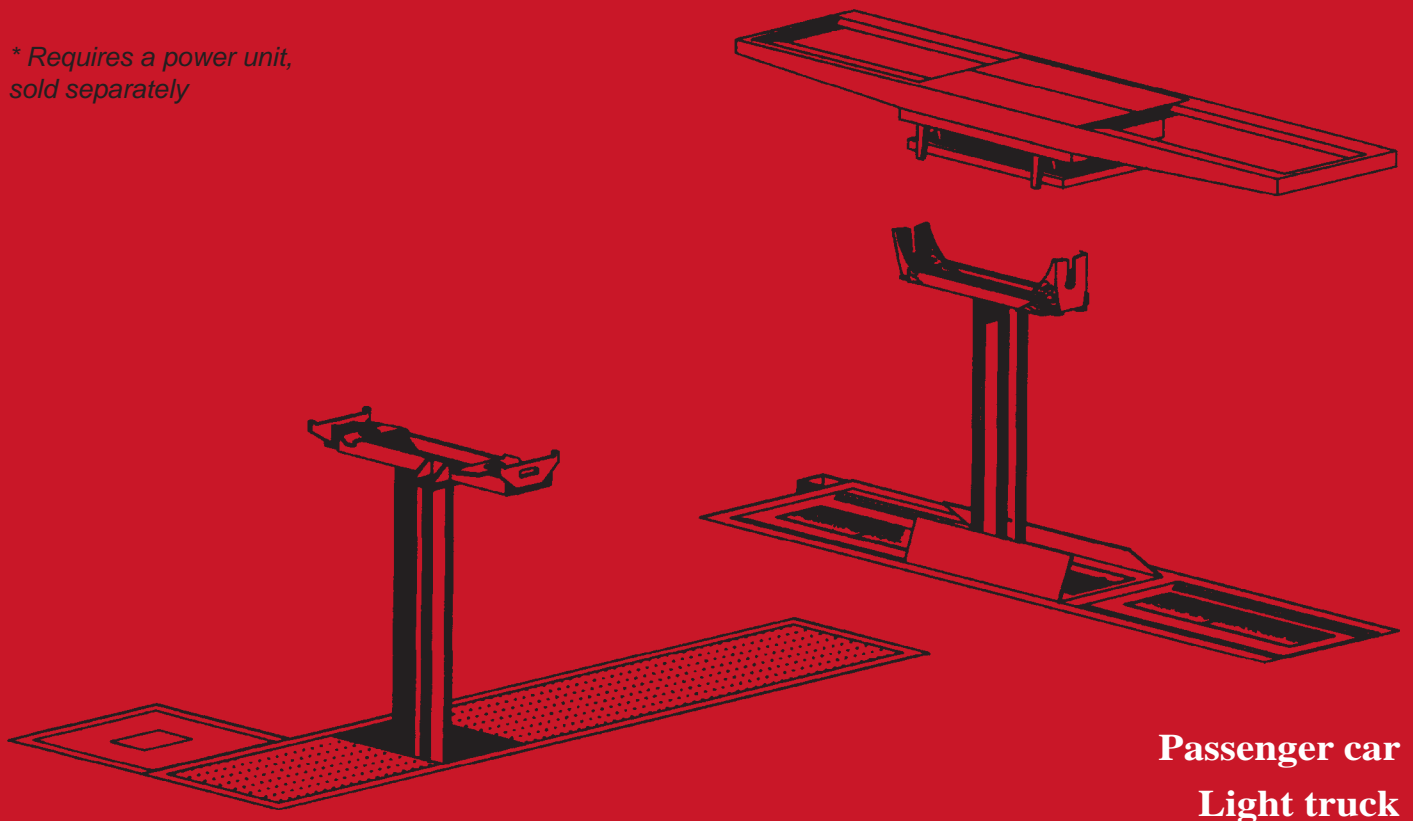

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-203 Standard Equipment:

8 foot front frame (non-recessed), manual waist height release automatic lift locks, leverage bar front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 34" to 50-3/4" in width and standard rear adapters are adjustable from 20" to 30-1/2".

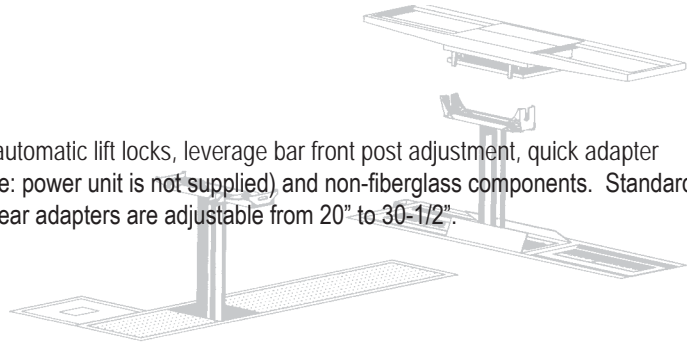

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9670-009-L	9' Front Frame	SV-9670-013-L	13' Front Frame
SV-9670-010-L	10' Front Frame	SV-9670-014-L	14' Front Frame
SV-9670-011-L	11' Front Frame	SV-9670-015-L	15' Front Frame
SV-9670-012-L	12' Front Frame	SV-9670-015-L	16' Front Frame

Additional front frame length including a control box extension and manual ratchet drive.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-85-009E-L	9' Frame, Control Ext. & Ratchet	SV-85-013E-L	13' FramE, Control Ext. & Ratchet
SV-85-010E-L	10' Frame, Control Ext. & Ratchet	SV-85-014E-L	14' FramE, Control Ext. & Ratchet
SV-85-011E-L	11' Frame, Control Ext. & Ratchet	SV-85-015E-L	15' FramE, Control Ext. & Ratchet
SV-85-012E-L	12' Frame, Control Ext. & Ratchet	SV-85-015E-L	16' FramE, Control Ext. & Ratchet

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-52-L

Power Spot Upgrade:

Not available on this model.

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9670-05FG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9670FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground


An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

2P-107

- **Lifting capacity: 17,500 lbs., 5,500 front & 12,000 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Air/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 7-1/2" front & 10-5/8" rear**
- **Displacement: 39 gallons**
- **Raised vehicle contact height above floor: 69" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

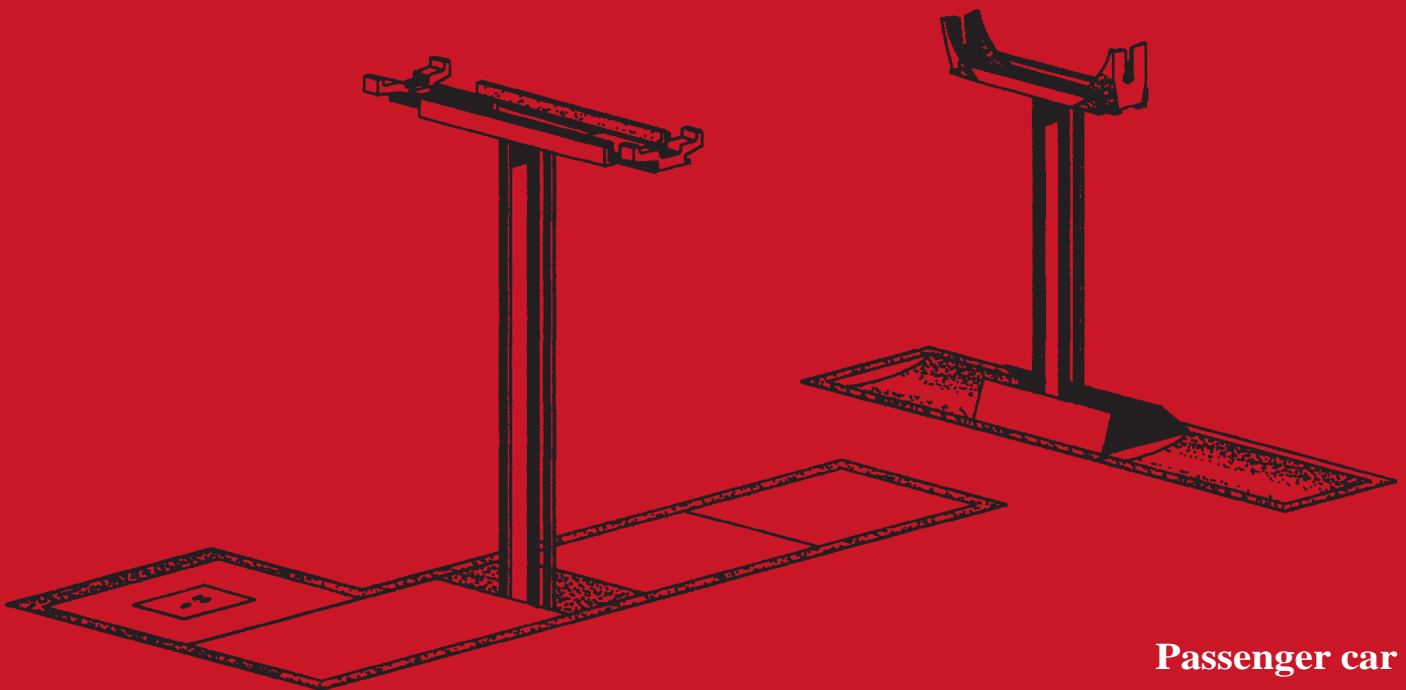

Passenger car
Light truck
Medium Truck

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-107 Standard Equipment:

8 foot front frame (nonrecessed), manual waist height release automatic lift locks, leverage bar front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, standard bottom pipe tank with low oil lock and non-fiberglass components. Standard front adapters adjust from 37-1/2" to 60" in width and standard rear adapters are adjustable from 24" to 44".

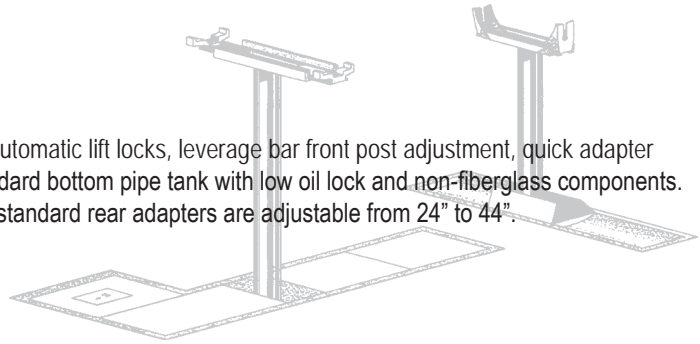

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9670-009-L	9' Front Frame	SV-9670-013-L	13' Front Frame
SV-9670-010-L	10' Front Frame	SV-9670-014-L	14' Front Frame
SV-9670-011-L	11' Front Frame	SV-9670-015-L	15' Front Frame
SV-9670-012-L	12' Front Frame	SV-9670-016-L	16' Front Frame

Additional front frame length including a control box extension and manual ratchet drive.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-85-009H-L	9' Frame. Control Ext. & Ratchet	SV-85-013H-L	13' Frame. Control Ext. & Ratchet
SV-85-010H-L	10' Frame. Control Ext. & Ratchet	SV-85-014H-L	14' Frame. Control Ext. & Ratchet
SV-85-011H-L	11' Frame. Control Ext. & Ratchet	SV-85-015H-L	15' Frame. Control Ext. & Ratchet
SV-85-012H-L	12' Frame. Control Ext. & Ratchet	SV-85-016H-L	16' Frame. Control Ext. & Ratchet

Air Lock Upgrade:

Converts standard manual release locks to a remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-54-L

Power Spot Upgrade:

Not available on this model.

Tank Upgrade:

Your choice of three upgrades. Add fiberglass coating or go to a top pipe style tank. Fiberglass coating protects your component from corrosion.

Globe Upgrade Number	Description
SV-9805-L	Add Fiberglass Coating to the Standard Tank

Please note: Top pipe tank not available for 2P-107

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9670-05FG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9667-32FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly




Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115
phone: 815-748-0200 • 800-321-8173
fax: 815-748-0210 • 800-899-1784

2P-108

- **Lifting capacity: 24,000 lbs., 8,000 front & 16,000 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Electric/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 7-1/2" front & 10-5/8" rear**
- **Displacement: 39 gallons**
- **Raised vehicle contact height above floor: 69" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

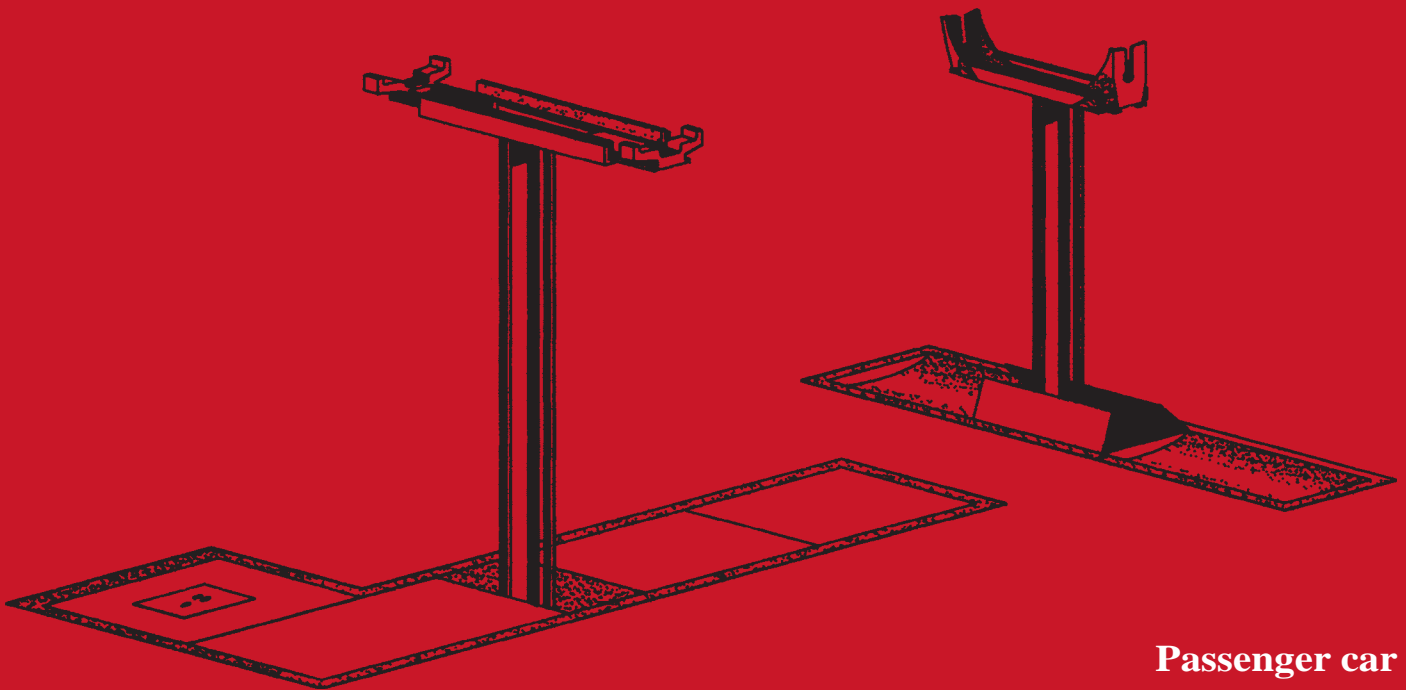

Passenger car
Light truck
Medium Truck

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-108 Standard Equipment:

8 foot front frame (non-recessed), manual waist height release automatic lift locks, leverage bar front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 37-1/2" to 60" in width and standard rear adapters are adjustable from 24" to 44".

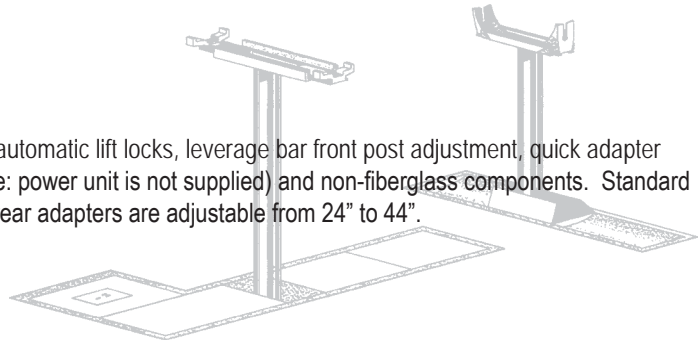

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accomodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9670-009-L	9' Front Frame	SV-9670-013-L	13' Front Frame
SV-9670-010-L	10' Front Frame	SV-9670-014-L	14' Front Frame
SV-9670-011-L	11' Front Frame	SV-9670-015-L	15' Front Frame
SV-9670-012-L	12' Front Frame	SV-9670-016-L	16' Front Frame

Additional front frame length including a control box extension and manual ratchet drive.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-85-009E-L	9' Frame, Control Ext. & Ratchet	SV-85-013E-L	13' Frame, Control Ext. & Ratchet
SV-85-010E-L	10' Frame, Control Ext. & Ratchet	SV-85-014E-L	14' Frame, Control Ext. & Ratchet
SV-85-011E-L	11' Frame, Control Ext. & Ratchet	SV-85-015E-L	15' Frame, Control Ext. & Ratchet
SV-85-012E-L	12' Frame, Control Ext. & Ratchet	SV-85-016E-L	16' Frame, Control Ext. & Ratchet

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-54-L

Power Spot Upgrade:

Not available on this model.

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9670-05FG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9667-32FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115


phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

Proven Lifting Solutions

2P-105

- **Lifting capacity: 24,000 lbs., 12,000 front & 12,000 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Air/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 10-5/8" front & rear**
- **Displacement: 50 gallons**
- **Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

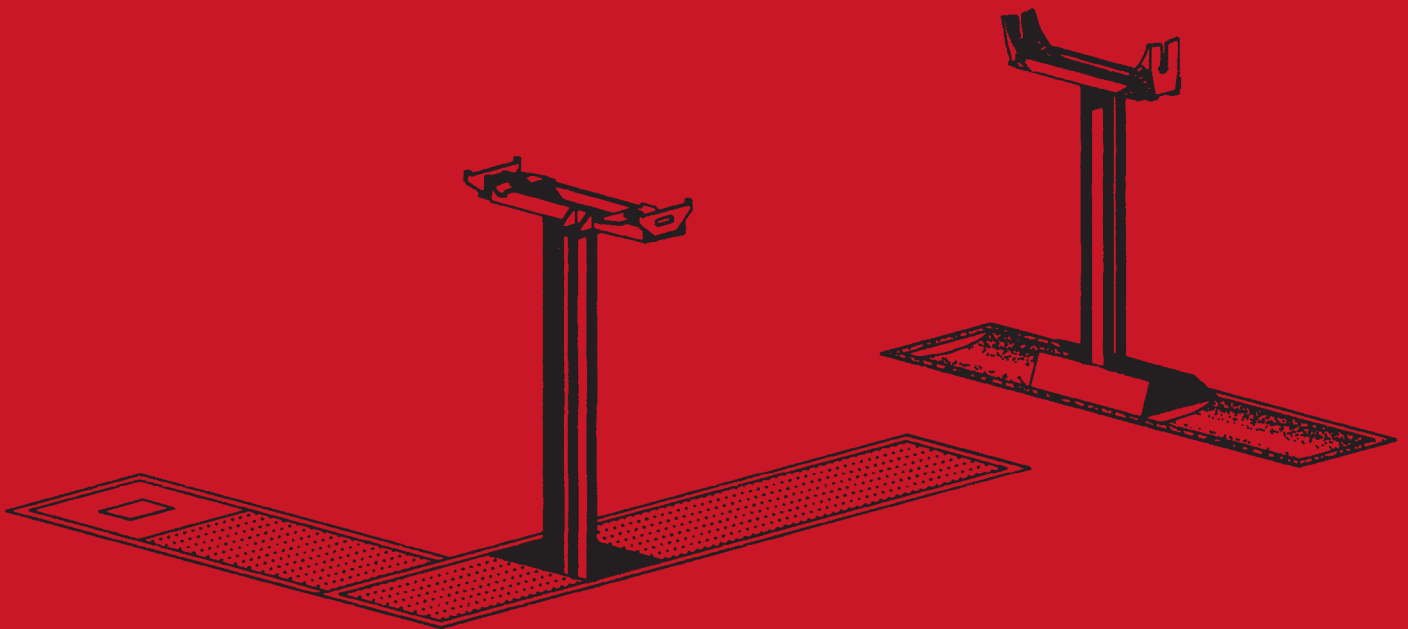

Truck Dealerships

School Buses

Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back


GLOBE

Proven Lifting Technology

“WS” Series Information

2P-105 Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, standard bottom pipe tank with low oil lock and non-fiberglass components. Standard front adapters adjust from 40-1/2” to 57-1/2” in width and standard rear adapters are adjustable from 24” to 49”

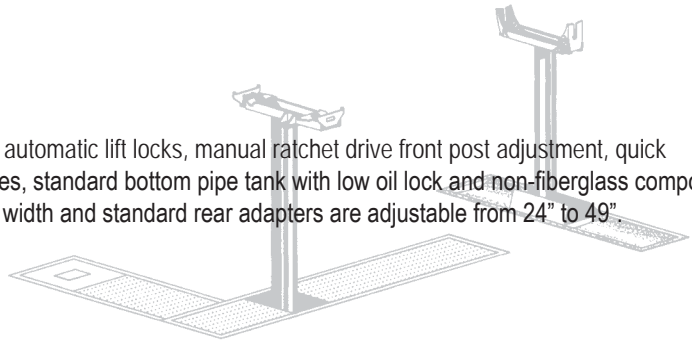

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accomodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame	Longer front frame lengths available per request	

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56-L

Power Spot Upgrade:

Not available on this model.

Tank Upgrade:

Your choice of three upgrades. Add fiberglass coating or go to a top pipe style tank. Fiberglass coating protects your component from corrosion. Top pipe style tanks give installers easy access to fittings and helps periodic inspection.

Globe Upgrade Number	Description
SV-9804-1-L	Add Fiberglass Coating to the Standard Tank
SV-9804-2-L	Change the Standard Tank to a Top Pipe Tank
SV-9804-3-L	Add Fiberglass Coating and Change the Standard Tank to a Top Pipe Tank

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9667-32RFG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground


An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

2P-105-M

- **Lifting capacity: 24,000 lbs., 12,000 front & 12,000 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging with modified narrow range rear saddle**
- **Adjustable front cylinder for various wheelbase lengths**
- **Air/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 10-5/8" front & rear**
- **Displacement: 50 gallons**
- **Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

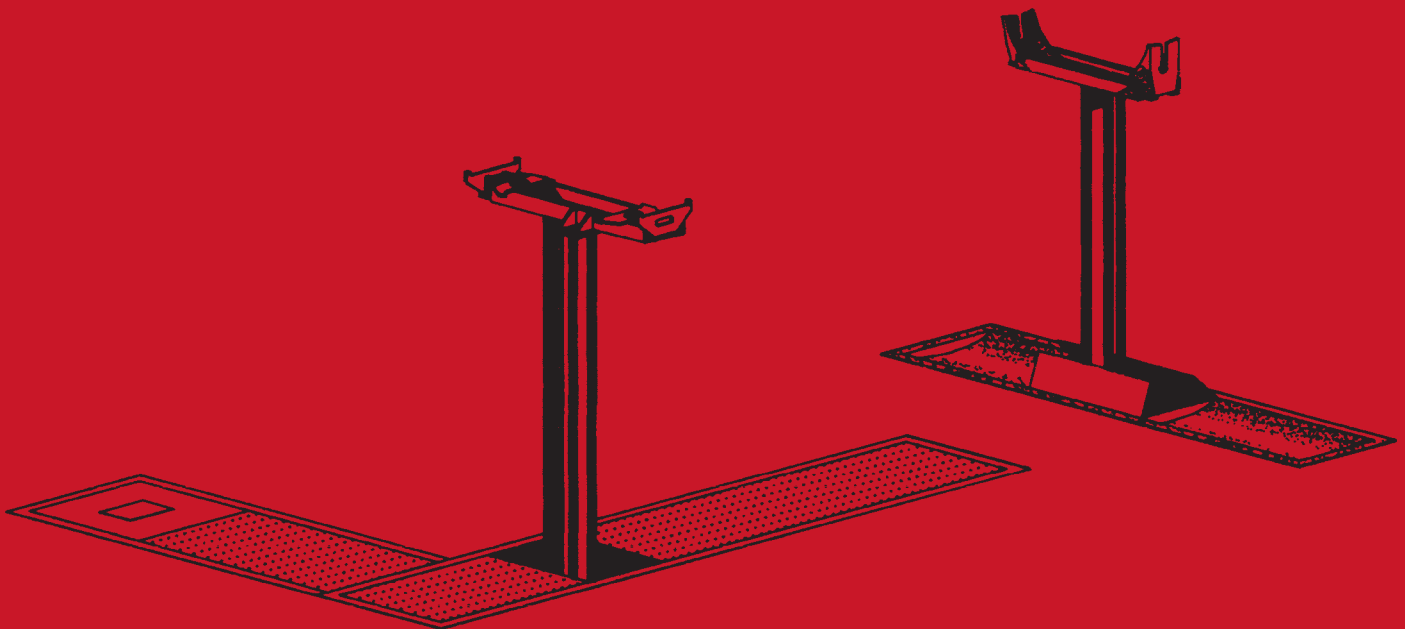

**Truck Dealerships
School Buses
Municipal Garages
or wherever heavy duty vehicle lifting is required**

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-105-M Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, standard bottom pipe tank with low oil lock and non-fiberglass components. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 24" to 44".

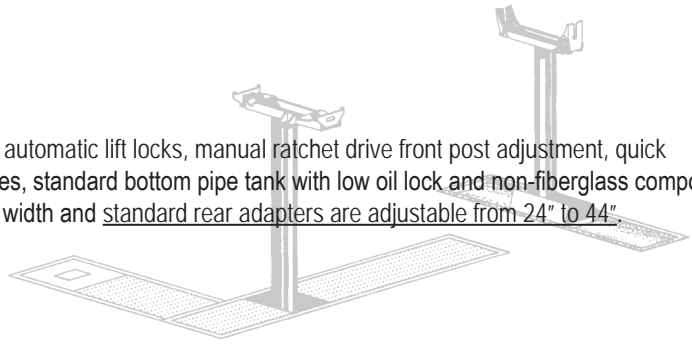

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accomodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame	Longer front frame lengths available per request	

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56-L

Power Spot Upgrade:

Not available on this model.

Tank Upgrade:

Your choice of three upgrades. Add fiberglass coating or go to a top pipe style tank. Fiberglass coating protects your component from corrosion. Top pipe style tanks give installers easy access to fittings and helps periodic inspection.

Globe Upgrade Number	Description
SV-9804-1-L	Add Fiberglass Coating to the Standard Tank
SV-9804-2-L	Change the Standard Tank to a Top Pipe Tank
SV-9804-3-L	Add Fiberglass Coating and Change the Standard Tank to a Top Pipe Tank

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

SVI Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9667-32FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground


An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

2P-105-IB

- **Lifting capacity: 24,000 lbs., 12,000 front & 12,000 rear**
- **Axle engaging front saddle and adapters. I-Beam style rear superstructure equipped with adjustable saddles and adapters to engage vehicle axles, suspension or cross frame member.**
- **Adjustable front cylinder for various wheelbase lengths**
- **Air/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 10-5/8" front & rear**
- **Displacement: 50 gallons**
- **Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

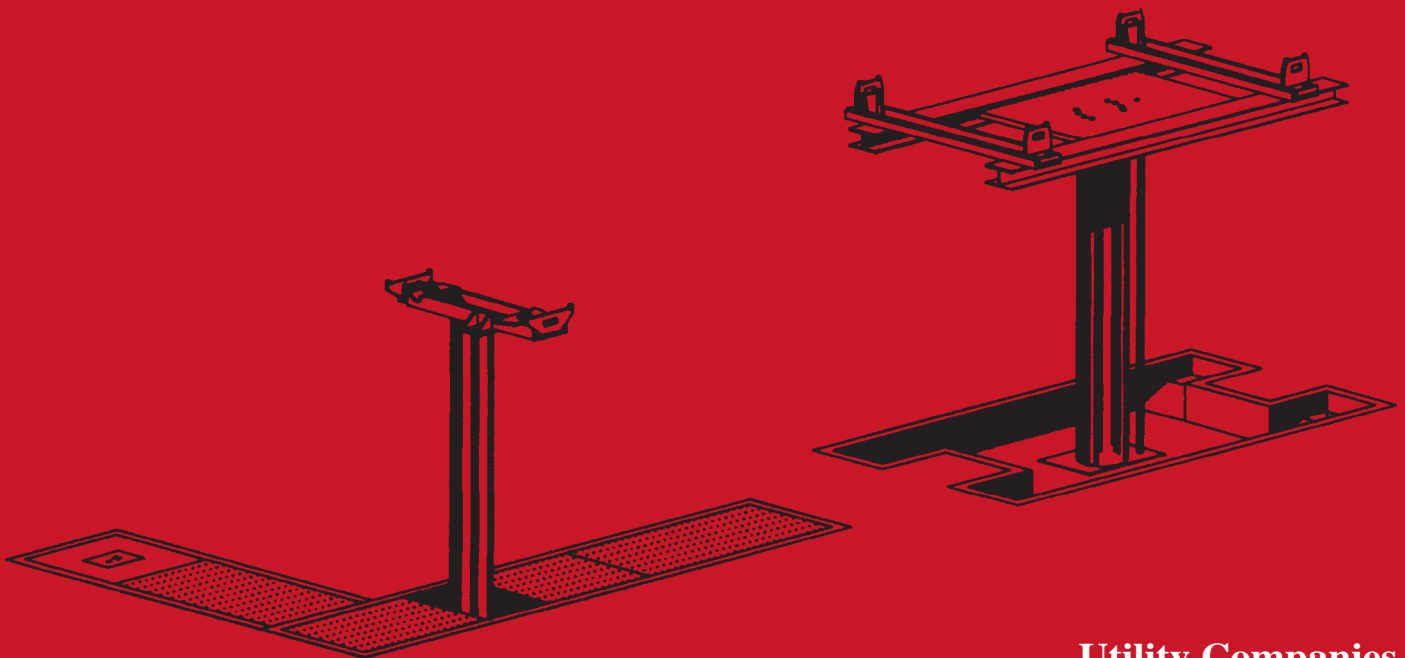

**Utility Companies
Fleet Service Facilities
Municipal Garages
or wherever heavy duty vehicle lifting is required**

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-105-IB Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, standard bottom pipe tank with low oil lock and non-fiberglass components. Standard front adapters adjust from 40-1/2” to 57-1/2” in width and standard rear adapters are adjustable from 20” to 37”.

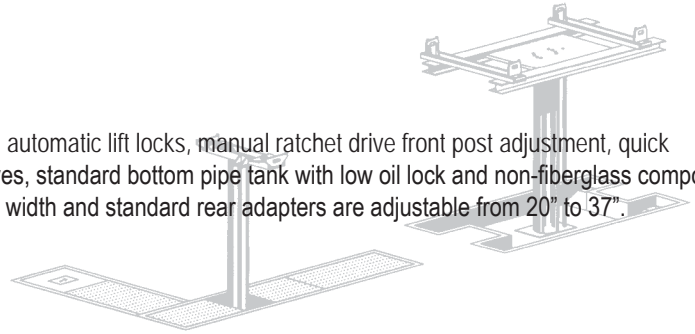

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56-L

Power Spot Upgrade:

Not available on this model.

Tank Upgrade:

Your choice of three upgrades. Add fiberglass coating or go to a top pipe style tank. Fiberglass coating protects your component from corrosion. Top pipe style tanks give installers easy access to fittings and helps periodic inspection.

Globe Upgrade Number	Description
SV-9804-1-L	Add Fiberglass Coating to the Standard Tank
SV-9804-2-L	Change the Standard Tank to a Top Pipe Tank
SV-9804-3-L	Add Fiberglass Coating and Change the Standard Tank to a Top Pipe Tank

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9667-32DFG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173


fax: 815-748-0210 • 800-899-1784

Proven Lifting Solutions

2P-106*

- **Lifting capacity: 36,000 lbs., 18,000 front & 18,000 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Electric/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 10-5/8" front & rear**
- **Displacement: 50 gallons**
- **Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

** Requires a power unit*

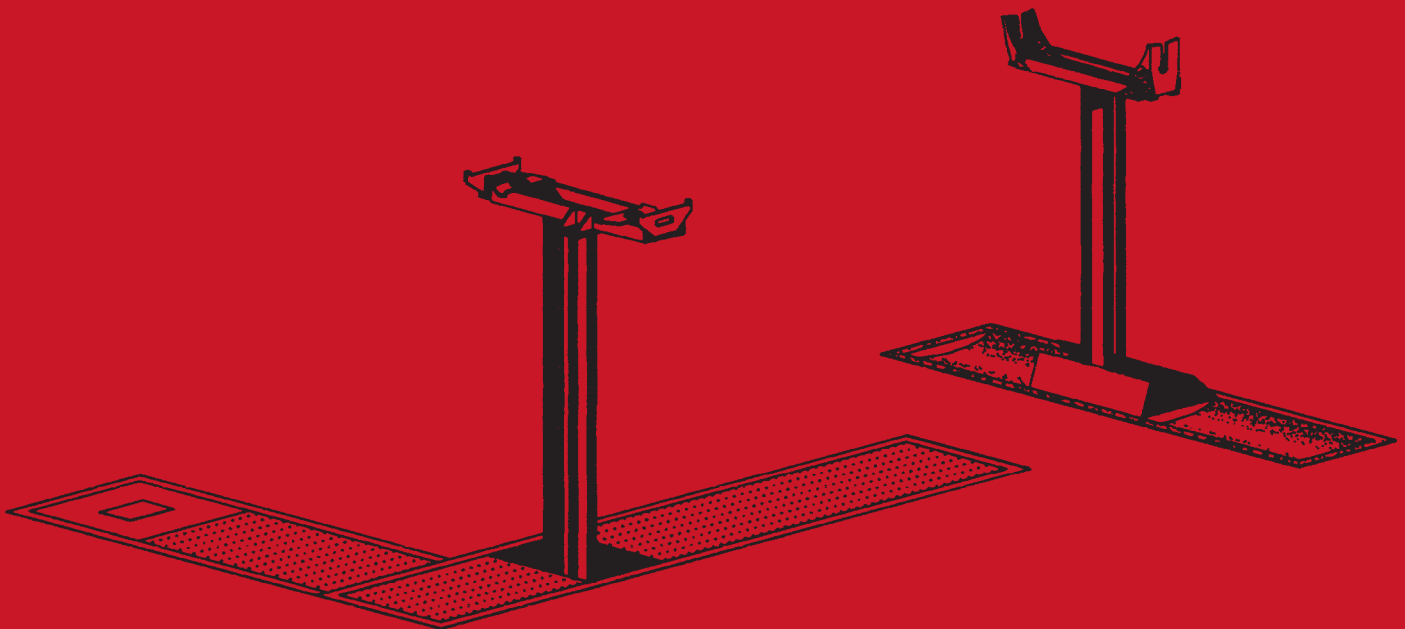

Truck Dealerships

School Buses

Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-106 Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2” to 57-1/2” in width and standard rear adapters are adjustable from 24” to 49”

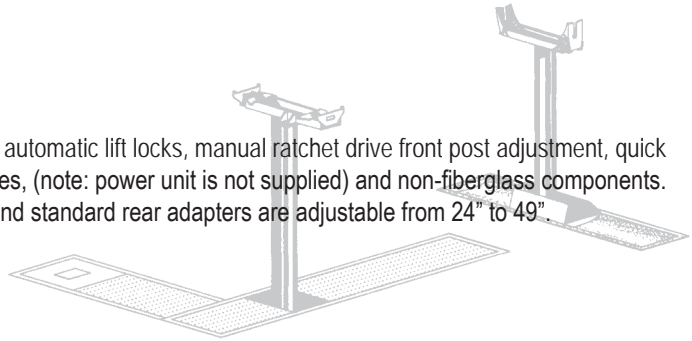

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accomodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9667-32FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173


fax: 815-748-0210 • 800-899-1784

Proven Lifting Solutions

2P-106-M*

- Lifting capacity: 36,000 lbs., 18,000 front & 18,000 rear
- Single moveable front and single stationary rear
- Axle engaging with modified narrow range rear saddle
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: 10-5/8" front & rear
- Displacement: 50 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

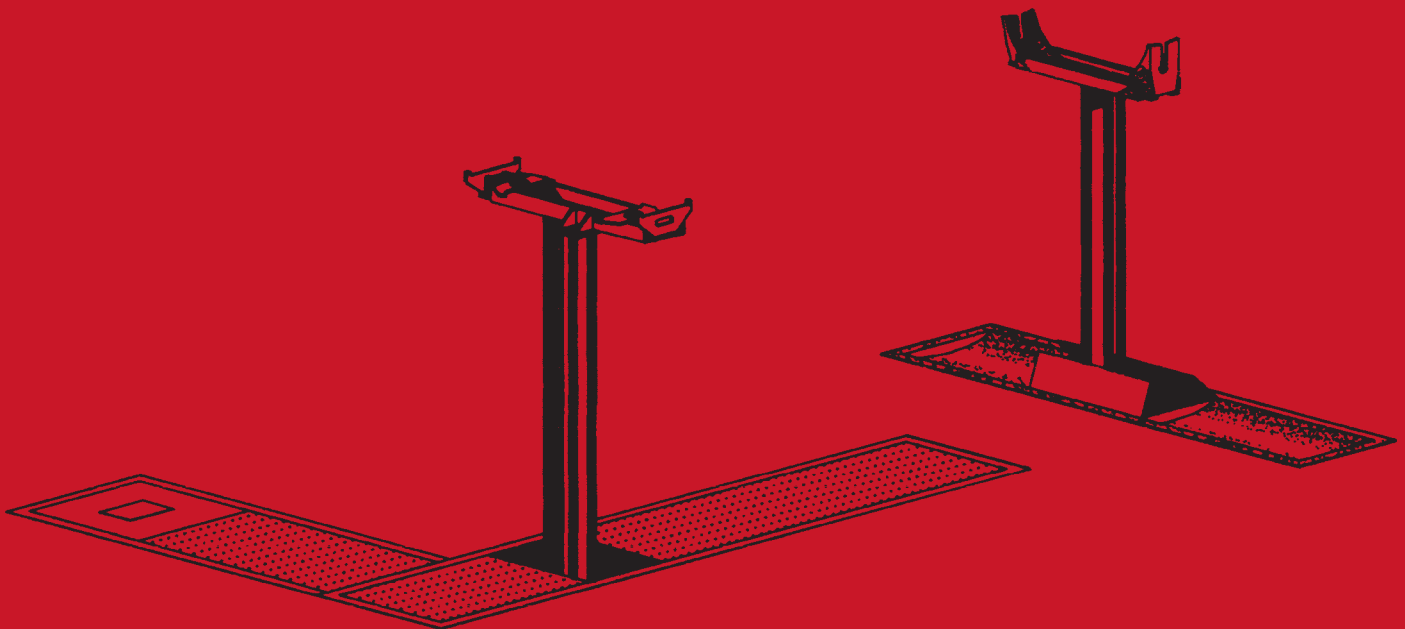

Truck Dealerships

School Buses

Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-106-M Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 24" to 44".

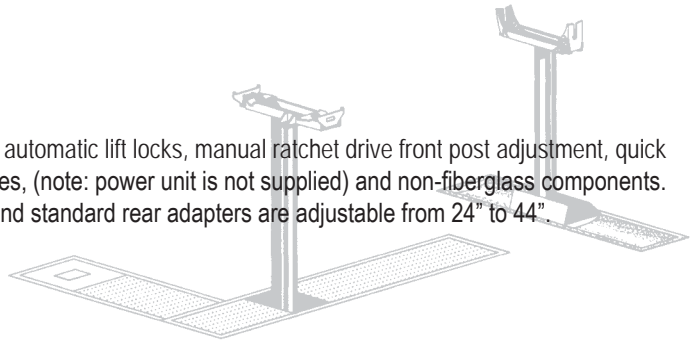

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9667-32FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115


phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

2P-106-IB

- Lifting capacity: 36,000 lbs., 18,000 front & 18,000 rear
- Axle engaging front saddle and adapters. I-Beam style rear superstructure equipped with adjustable saddles and adapters to engage vehicle axles, suspension or cross frame member.
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: 10-5/8" front & rear
- Displacement: 50 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

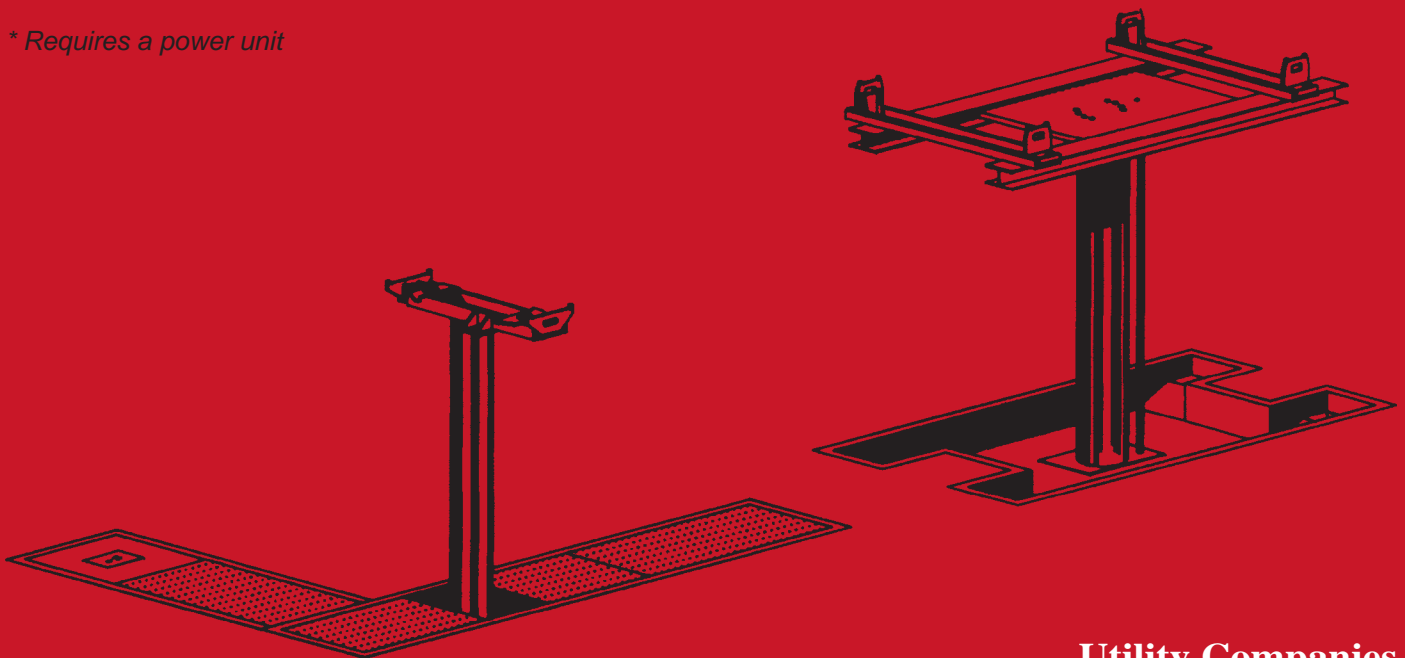

Utility Companies
Fleet Service Facilities
Municipal Garages
or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

fastest, most reliable and
economical method for lifting

for standards & options see back

GLOBE


entire contents copyright © 2011 SVI International, Inc.

Proven Lifting Technology

“WS” Series Information

2P-106-IB Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 20" to 37".

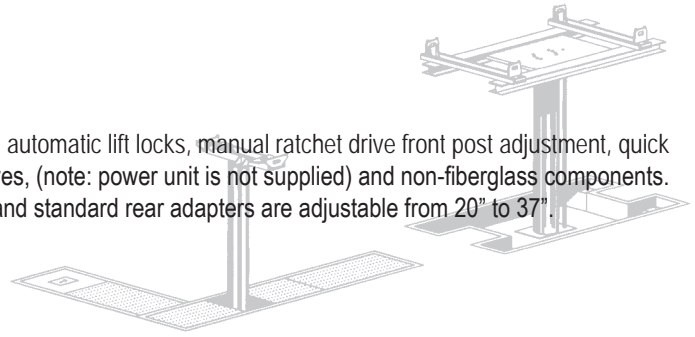

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your front cylinder component for added protection. Rear cylinders are supplied standard with fiberglass protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
BH-9667-32-DFG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115
phone: 815-748-0200 • 800-321-8173
fax: 815-748-0210 • 800-899-1784


Proven Lifting Solutions

3P-106-DR*

(supersedes Model MP-310EDR)

- **Lifting capacity: 54,000 lbs., 18,000 front & 36,000 rear**
- **Single moveable front and dual stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Electric/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 10-5/8" front & (2) 10-5/8" rear**
- **Displacement: 75 gallons**
- **Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

* Requires a power unit

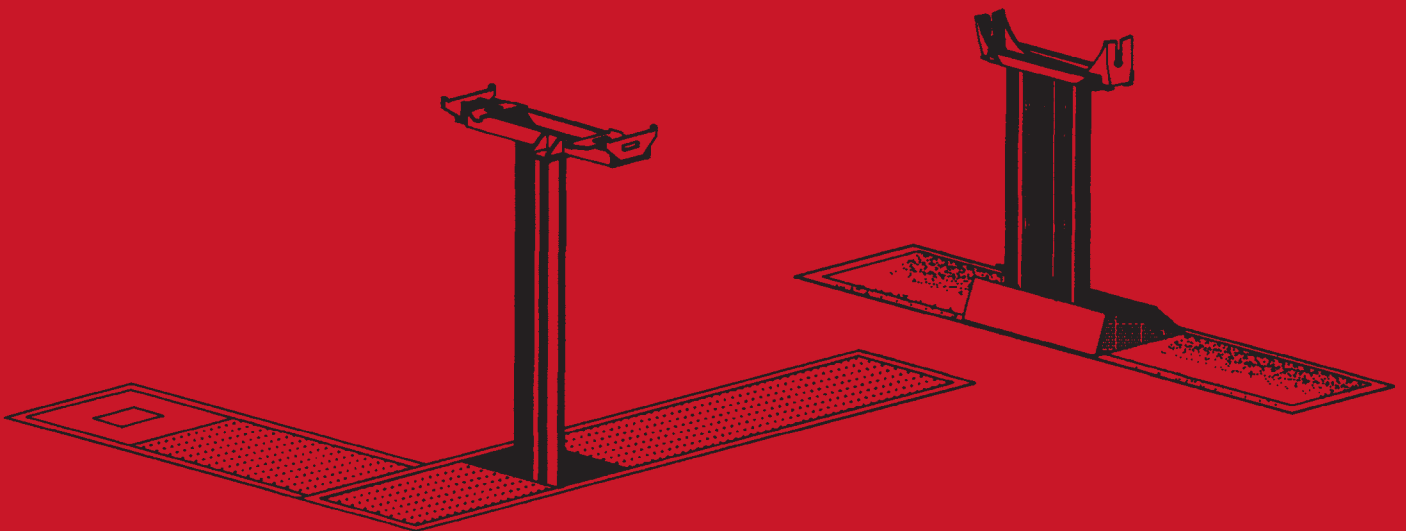

Utility Companies

Transit Authorities

Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

3P-106-DR Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and rear only fiberglass component. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 24" to 49".

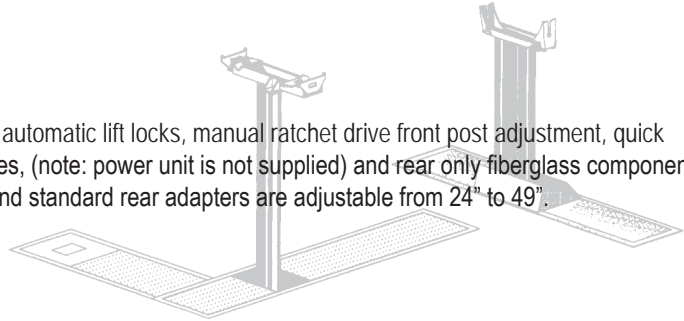

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56F/57-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your front cylinder component for added protection. Rear cylinders are supplied standard with fiberglass protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly




Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115
phone: 815-748-0200 • 800-321-8173
fax: 815-748-0210 • 800-899-1784

3P-106-DR-IB*

- Lifting capacity: 54,000 lbs., 18,000 front & 36,000 rear
- Axle engaging front saddle and adapters. I-Beam style dual rear superstructure equipped with adjustable saddles and adapters to engage vehicle axles, suspension or cross frame members.
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: 10-5/8" front & (2) 10-5/8" rear
- Displacement: 75 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

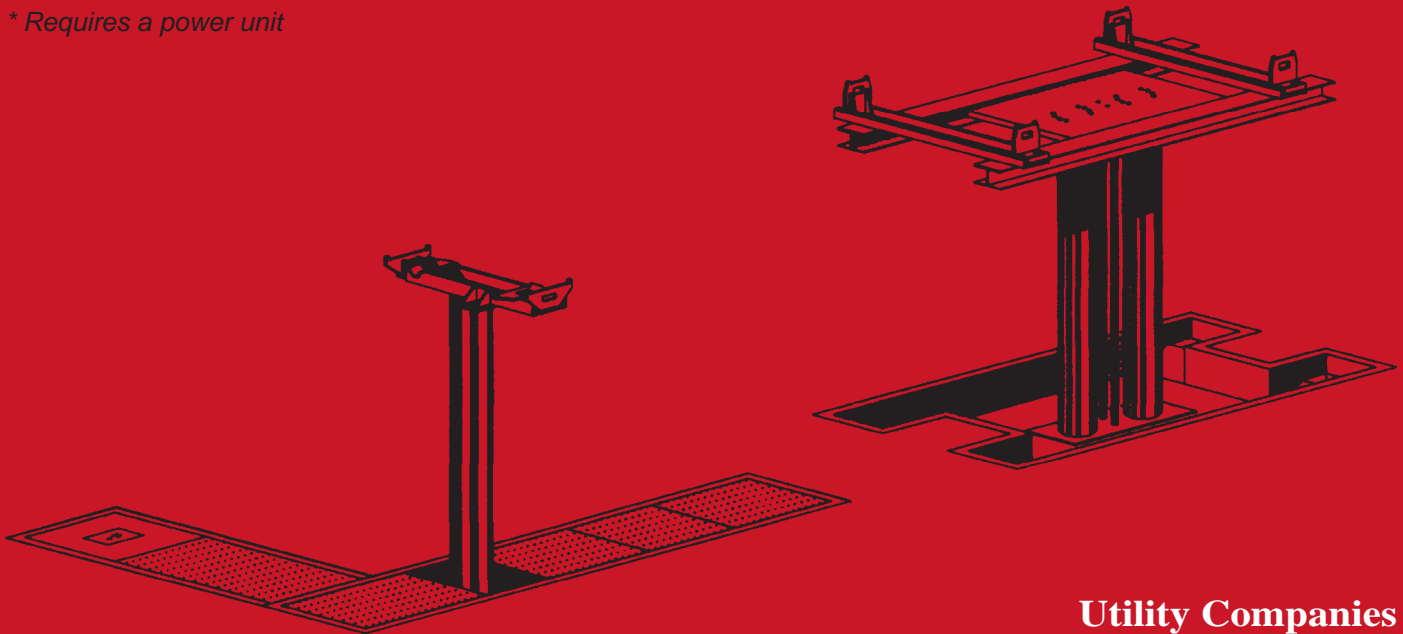

Utility Companies
Transit Authorities
Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

fastest, most reliable and
economical method for lifting

for standards & options see back




Proven Lifting Technology

“WS” Series Information

3P-106-DR-IB Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and rear only fiberglass component. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 24" to 44".

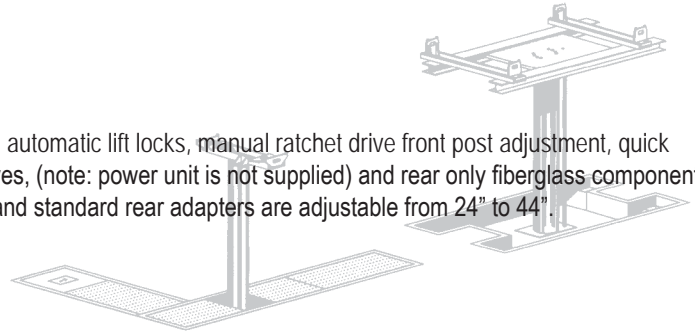

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56F/57-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your front cylinder component for added protection. Rear cylinders are supplied standard with fiberglass protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173


fax: 815-748-0210 • 800-899-1784

Proven Lifting Solutions

4P-106*

- Lifting capacity: 72,000 lbs., 36,000 front & 36,000 rear
- Dual moveable front and dual stationary rear
- Axle engaging
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: (2) 10-5/8" front & (2) 10-5/8" rear
- Displacement: 100 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

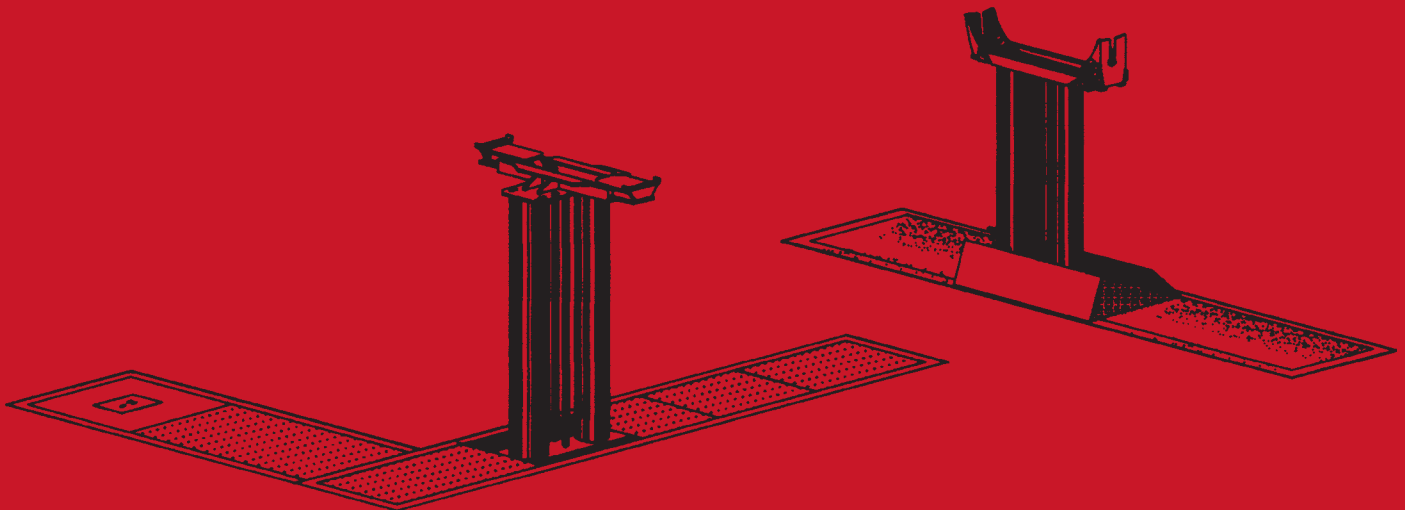

Airports

Fire Departments

Utility Companies

Transit Authorities

Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back

GLOBE

page 33


entire contents copyright © 2011 SVI International, Inc.

Proven Lifting Technology

“WS” Series Information

4P-106 Standard Equipment:

12 foot front frame (non-recessed), remote release multi-position automatic lift locks, power spot hydraulic drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and rear only fiberglass component. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 24" to 44".

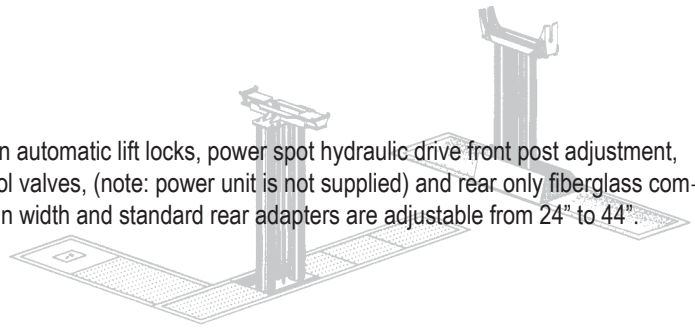

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Standard equipment

Power Spot Upgrade:

Standard equipment

Fiberglass Upgrade:

Fiberglass coat your front cylinder component for added protection. Rear cylinders are supplied standard with fiberglass protection.

Globe Upgrade Number	Description
SV-9674-85FG-L	Add Fiberglass Coating to the Front Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115


phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

4P-106-IB*

- Lifting capacity: 72,000 lbs., 36,000 front & 36,000 rear
- Axle engaging front saddle and adapters. I-Beam style rear superstructure equipped with adjustable saddles and adapters to engage vehicle axles, suspension or cross frame member.
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: (2) 10-5/8" front & (2) 10-5/8" rear
- Displacement: 100 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

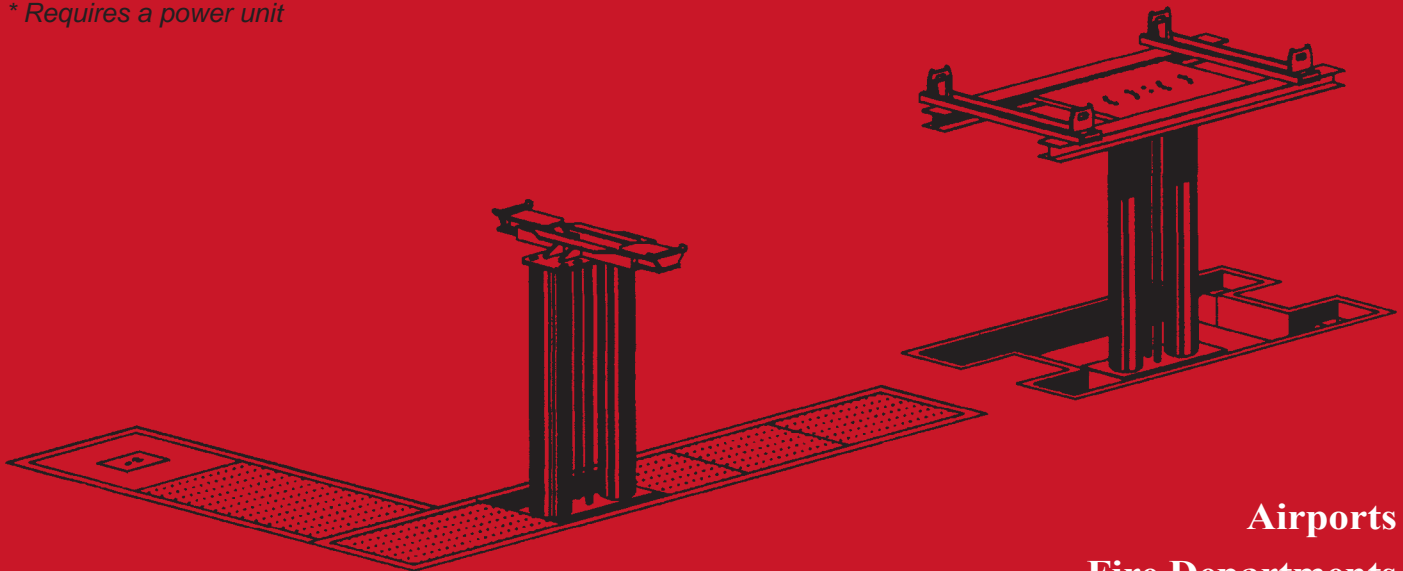

Airports
Fire Departments
Utility Companies
Transit Authorities
Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

4P-106-IB Standard Equipment:

12 foot front frame (non-recessed), remote release multi-position automatic lift locks, power spot hydraulic drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and rear only fiberglass component. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 24" to 44".

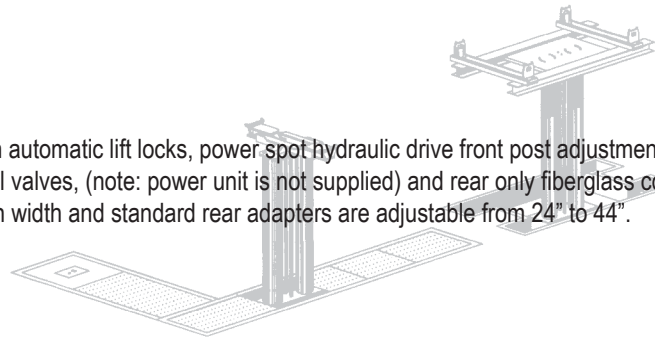

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Standard equipment

Power Spot Upgrade:

Standard equipment

Fiberglass Upgrade:

Fiberglass coat your front cylinder component for added protection. Rear cylinders are supplied standard with fiberglass protection.

Globe Upgrade Number	Description
SV-9674-85FG-L	Add Fiberglass Coating to the Front Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173


fax: 815-748-0210 • 800-899-1784

Proven Lifting Solutions

2P-1012*

- **Lifting capacity: 43,000 lbs., 18,000 front & 25,000 rear**
- **Single moveable front and single stationary rear**
- **Axle engaging**
- **Adjustable front cylinder for various wheelbase lengths**
- **Electric/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 10-5/8" front & 12-5/8" rear**
- **Displacement: 63 gallons**
- **Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

* Requires a power unit

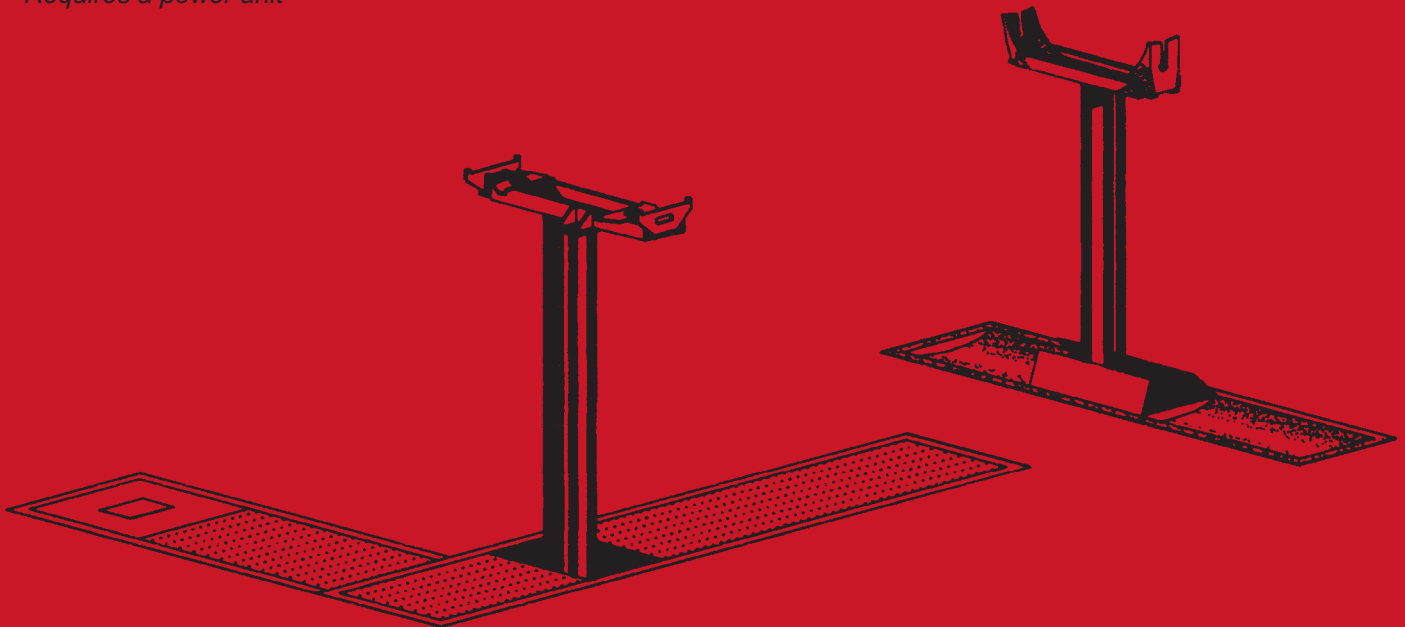

**Utility Companies
Transit Authorities
Municipal Garages
or wherever heavy duty vehicle lifting is required**

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back


GLOBE

Proven Lifting Technology

“WS” Series Information

2P-1012 Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2” to 57-1/2” in width and standard rear adapters are adjustable from 24” to 49”.

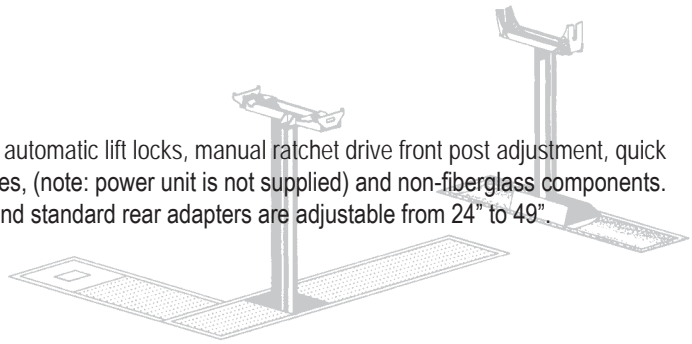

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56F/06C-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9673-012FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173


fax: 815-748-0210 • 800-899-1784

Proven Lifting Solutions

2P-1012-IB*

- Lifting capacity: 43,000 lbs., 18,000 front & 25,000 rear
- Single moveable front and single stationary rear
- Axle engaging front saddle and adapters. I-Beam style rear superstructure equipped with adjustable saddles and adapters to engage vehicle axles, suspension or cross frame member.
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: 10-5/8" front & 12-5/8" rear
- Displacement: 63 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

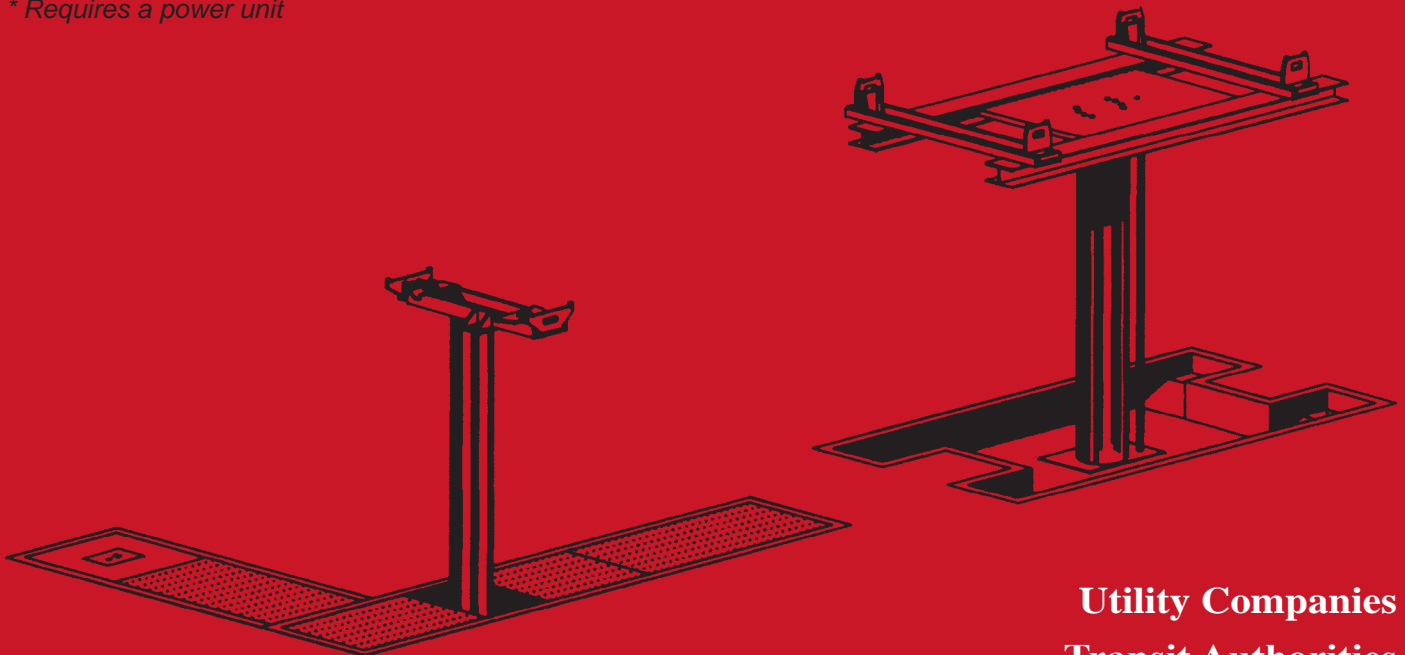

Utility Companies
Transit Authorities
Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back

GLOBE


entire contents copyright © 2011 SVI International, Inc.

Proven Lifting Technology

“WS” Series Information

2P-1012IB Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2” to 57-1/2” in width and standard rear adapters are adjustable from 24” to 49”.

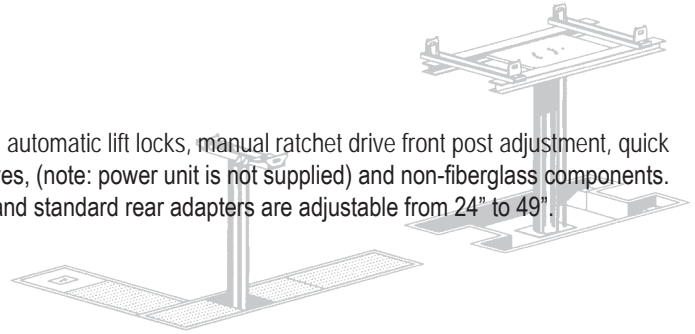

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56F/06C-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9673-012FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115


phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784

2P-1012-DDWS*

- Lifting capacity: 43,000 lbs., 18,000 front & 25,000 rear
- Single moveable front and single stationary rear
- Axle engaging front saddle and adapters and dual dish rear wheel support.
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: 10-5/8" front & 12-5/8" rear
- Displacement: 63 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

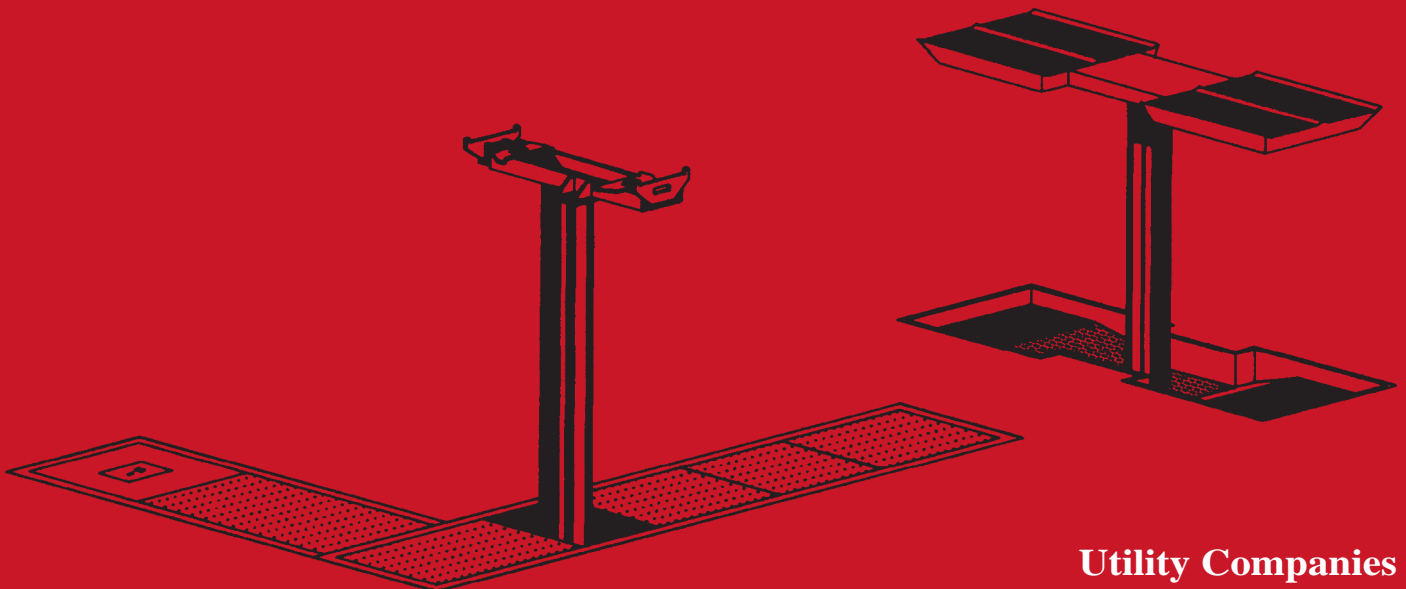

Utility Companies
Transit Authorities
Municipal Garages
or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-1012-DDWS Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and rear is fixed dual dish wheel support 11" wide.

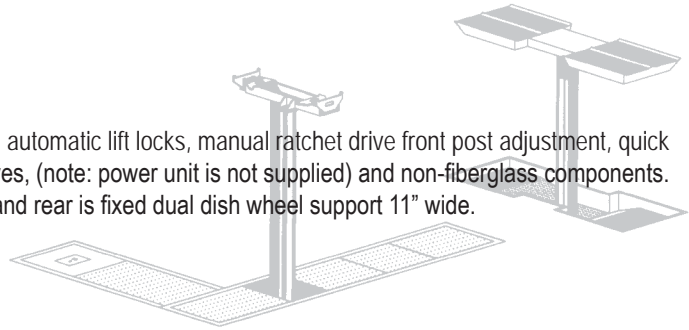

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56F/06C-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9673-012DFG-L	Add Fiberglass Coating to the Rear Cylinder Assembly




Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115
phone: 815-748-0200 • 800-321-8173
fax: 815-748-0210 • 800-899-1784

2P-1012-DOR*

- Lifting capacity: 43,000 lbs., 18,000 front & 25,000 rear
- Single moveable front and single stationary rear
- Axle engaging front saddle and adapters and platform style rear drive on runway wheel support.
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or biodegradable fluid operated
- Post diameters: 10-5/8" front & 12-5/8" rear
- Displacement: 63 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

* Requires a power unit

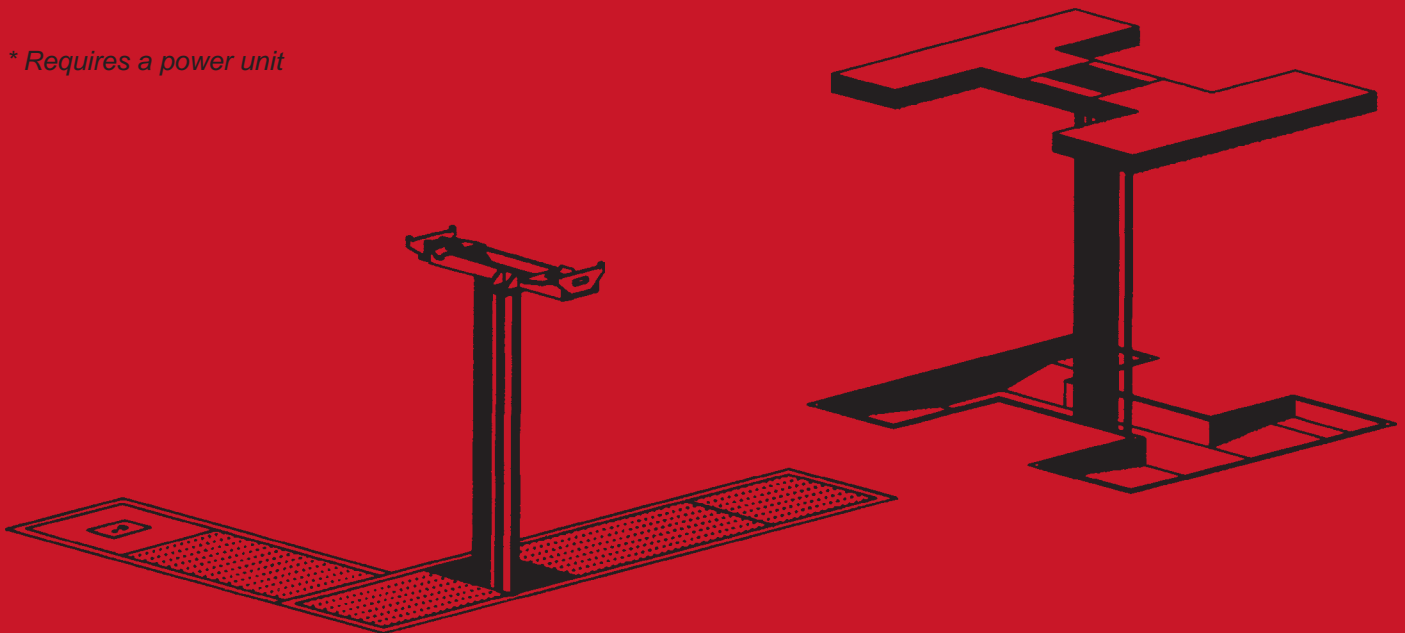

Utility Companies

Transit Authorities

Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

fastest, most reliable and
economical method for lifting

for standards & options see back




Proven Lifting Technology

“WS” Series Information

2P-1012-DOR Standard Equipment:

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and rear is fixed platform style drive on runway 106" wide.

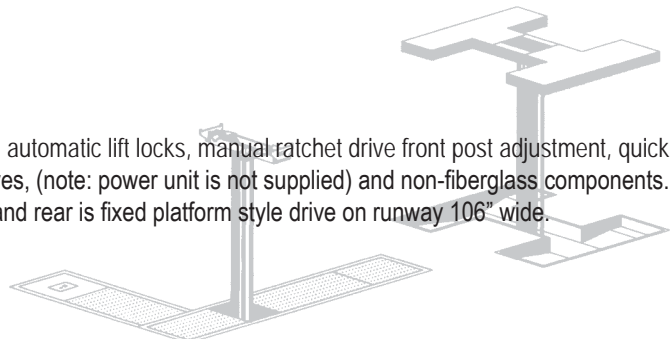

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

Globe Upgrade Number	Description	Globe Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame		Longer front frame lengths available per request

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56F/06C-L

Power Spot Upgrade:

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. To upgrade order SV-32-L

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9673-012DFG-L	Add Fiberglass Coating to the Rear Cylinder Assembly



Since 1928 on solid ground


An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115
phone: 815-748-0200 • 800-321-8173
fax: 815-748-0210 • 800-899-1784

Proven Lifting Solutions

2PF-1212-IB* (supersedes Model D-SH-212E)

- **Lifting capacity: 50,000 lbs., 25,000 front & 25,000 rear**
- **Single stationary front and single stationary rear**
- **I-Beam style front and rear superstructures equipped with adjustable saddles and adapters to engage vehicle axles, suspension or cross frame member.**
- **Electric/hydraulic oil or biodegradable fluid operated**
- **Post diameters: 12-5/8" front & 12-5/8" rear**
- **Displacement: 76 gallons**
- **Raised vehicle contact height above floor: 69-3/4" front and rear based on standard adapters**
- **Multiple lip seal seal design for increased performance**

* Requires a power unit

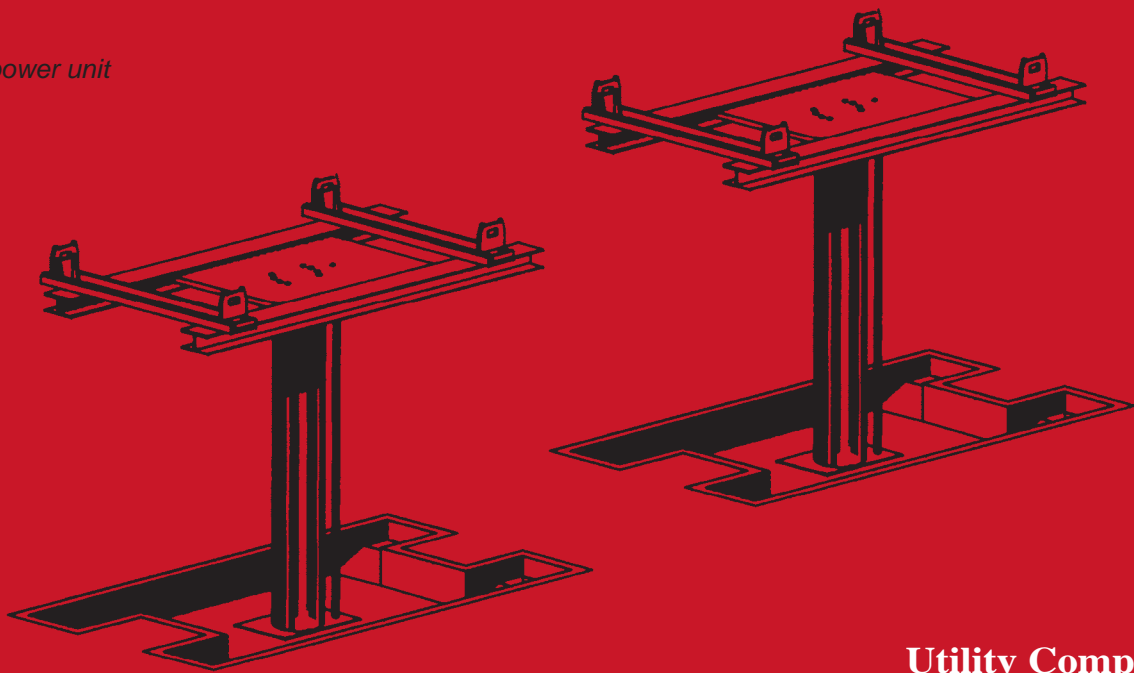

Utility Companies

Transit Authorities

Municipal Garages

or wherever heavy duty vehicle lifting is required

Globe "WS" Series Lifting Systems

**fastest, most reliable and
economical method for lifting**

for standards & options see back

GLOBE


entire contents copyright © 2011 SVI International, Inc.

Proven Lifting Technology

“WS” Series Information

2P-1012IB Standard Equipment:

Manual waist height release automatic lift locks, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front and rear adapters adjust from 24" to 49".

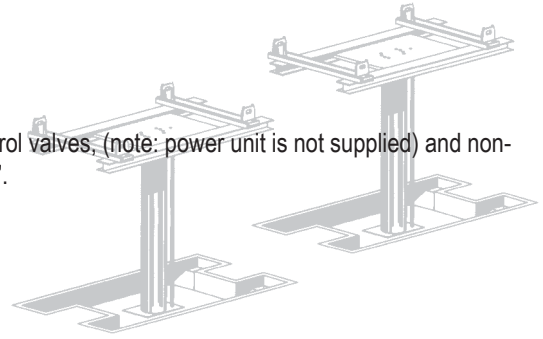

Your Easy Upgrade Options:


Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. To upgrade order SV-56F/06C-L

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

Globe Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9673-012FG-L	Add Fiberglass Coating to the Rear Cylinder Assembly

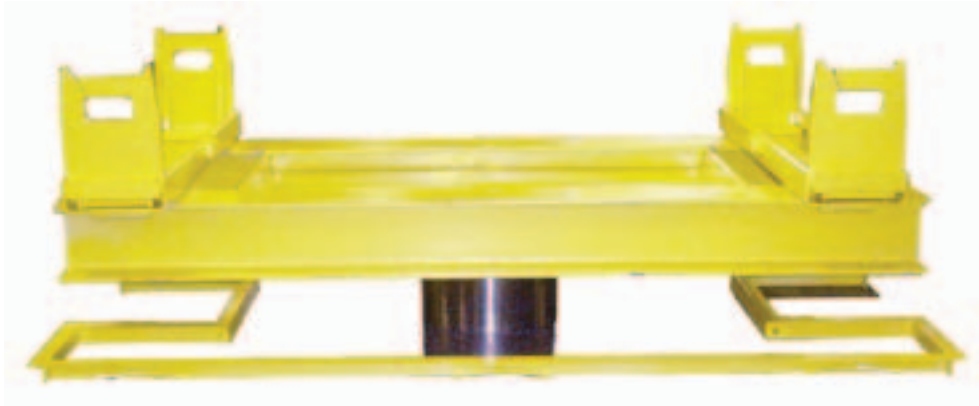

Since 1928 on solid ground

An SVI Brand Product Line • 155 Harvestore Drive, DeKalb, IL 60115

phone: 815-748-0200 • 800-321-8173

fax: 815-748-0210 • 800-899-1784